

ORDER INFORMATION

SPECIFICATION

Current Rating: 2 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature:-40°C to +105°C





MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin:Copper Alloy

5 P S 2 S D A 7 2 - 2 X X X X N N N X U - 0 0

2: Dual Row	No. of Pin Per Row(02~40)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u" S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg	T:Tube, W/O Cap C:Tube, With Cap H:Tape & Reel,W/O Cap R:Tape & Reel,With Cap	RoHS
			N:W/O Bump	N:Non Type	

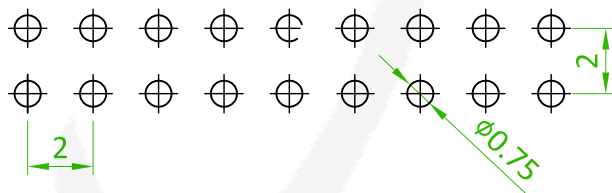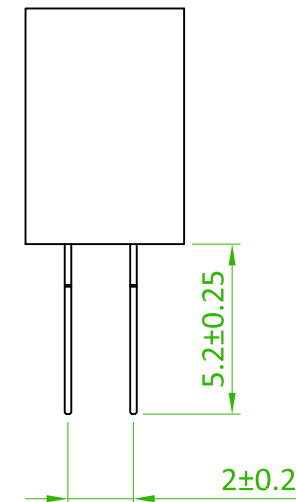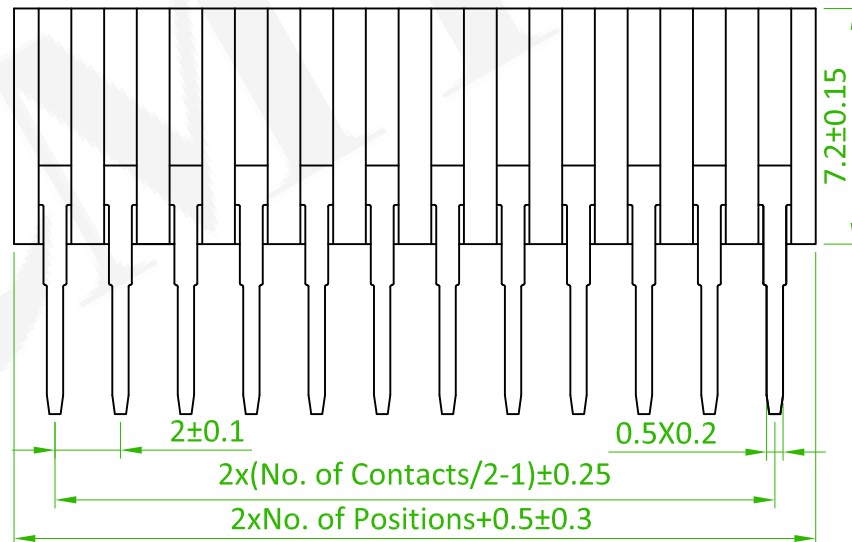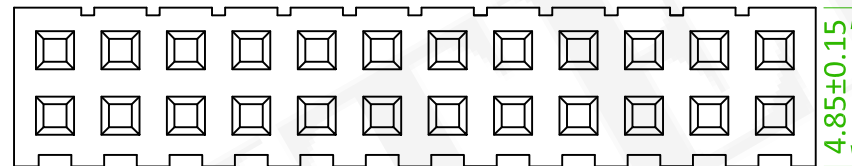

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. : PS2S72-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm D/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PS2SDA72-2XXXXNXXU-00				繪圖 DRAWN	Jeff 2015/08/27
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2015/08/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/27	
	公差 TOLERANCE	.X ±0.25 .XX ±0.20	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	