

ORDER INFORMATION

SPECIFICATION

Current Rating: 2 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature:-40°C to +105°C



MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black



Contact Pin:Copper Alloy

5 P S 2 S D B 6 3 - 4 X X X X N N N T U - 0 0

4:Quad Row	No. of Pin Per Row(02~40)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"
------------	------------------------------	---

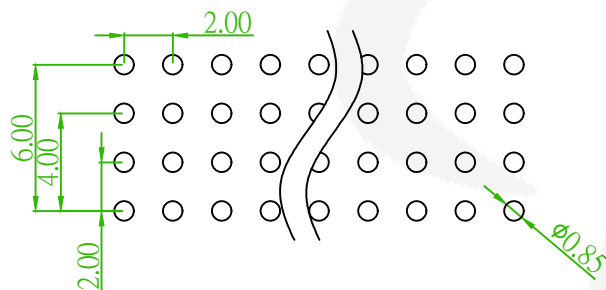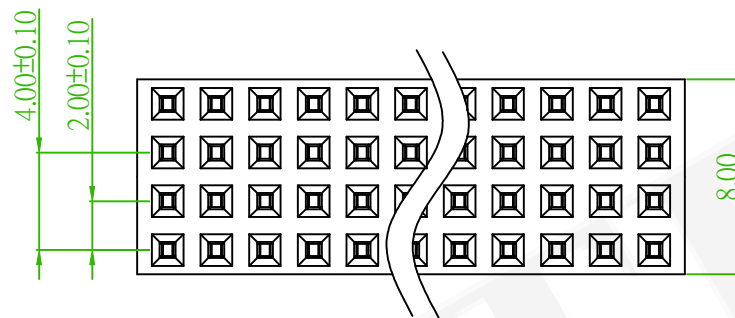

Recommended PCB Layout
(PCB TOLERANCE ±0.05) B

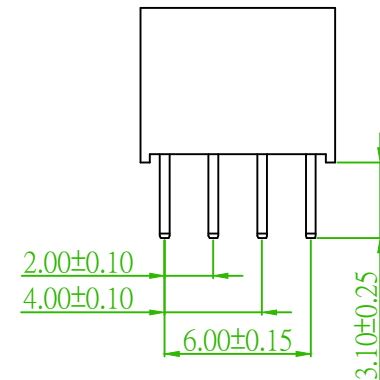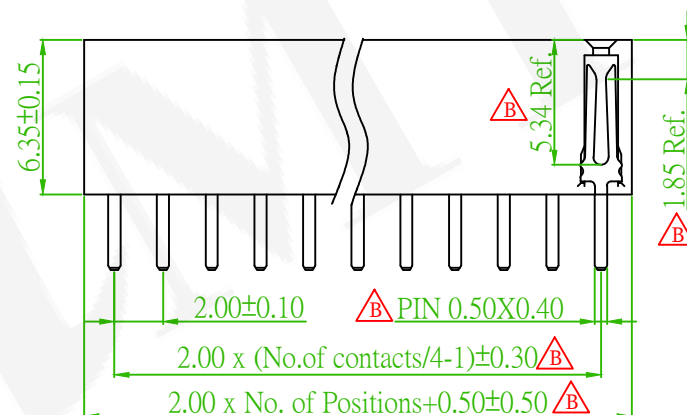

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2SDB63-4XXXXNNNTU-00				繪圖 DRAWN	Nick 2019/10/14
	圖號 DRAWING NO.	GN147-NI432	版本 REV.	B	核對 CHECKED	Josh 2019/10/14	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/10/14	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

B x6	ECN NO.:210661 Revise the drawing	Alice	2021/07/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE