

# ORDER INFORMATION



## SPECIFICATION

Current Rating: 2 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

## MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black  
 Contact Pin: Copper Alloy

5 P S 2 S D D 6 3 - 1 X X X X N N N T U - 0 0

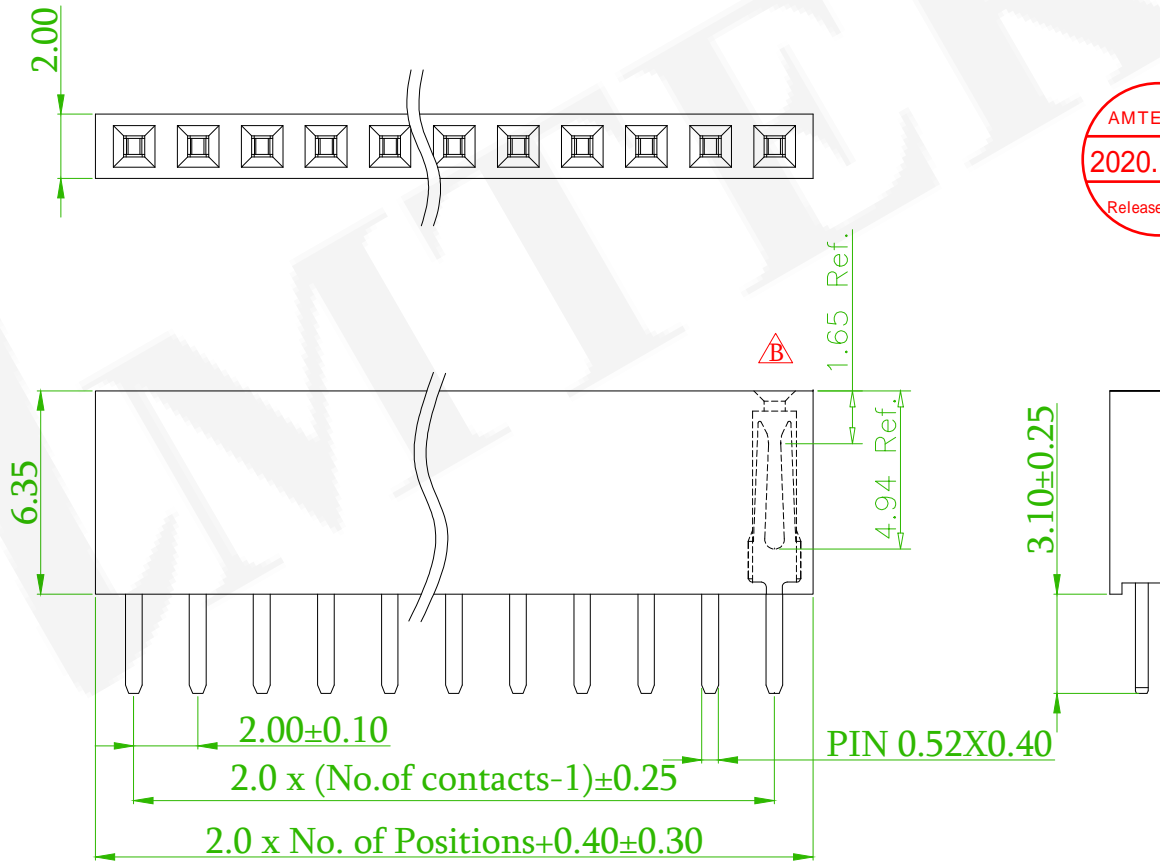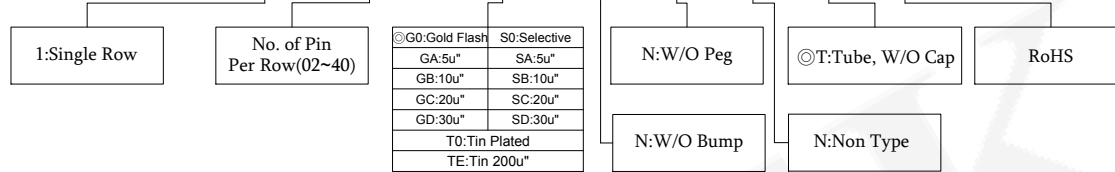

耀德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	5PS2SDD63-1XXXXNNTU-00			繪圖 DRAWN	Nick 2019/10/14	
圖號 DRAWING NO.	GN147-NI431	版本 REV.	B	核對 CHECKED	Josh 2019/10/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/10/14	
公差 TOLERANCE	.X ± 0.38	.XX ± 0.25	.X° ±3	單位 UNIT	mm	THIRD ANGLE PROJECTION

△x1	ECN NO:201012 Revised the Drawing	Alice	2020/11/06
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE