

ORDER INFORMATION




SPECIFICATION

Current Rating: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

5 P S 2 S H A 2 0 - 1 X X X X X X X U - 0 0

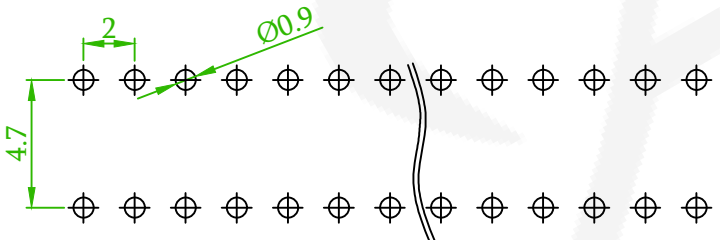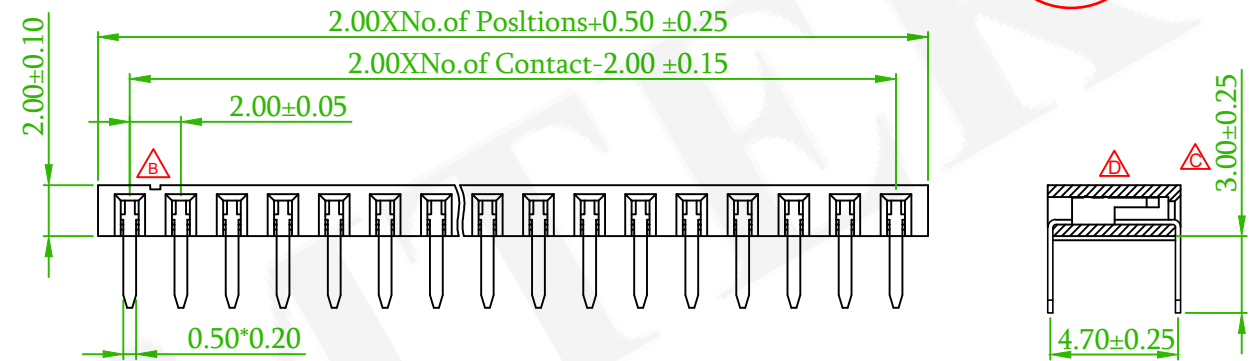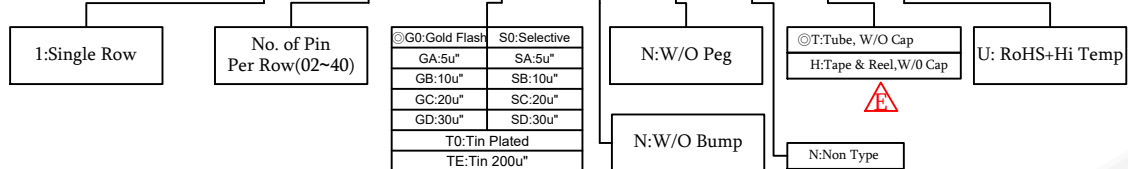

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Old Part No. : PS2RS-1XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm S/R R/A DIP TYPE				頁數 Page	1/1
	品號 PART NO.	△ 5PS2SHA20-1XXXXXXXXXU-00				繪圖 DRAWN	Kent 2006/09/21
	圖號 DRAWING NO.	GN003-RL174	版本 REV.	E	核對 CHECKED	Paul 2006/09/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2006/09/21	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

△x2	ECN NO.:230301 Revise the drawing	Alice	2023/03/16
△	Add the Contact Point	Alice	2020/11/26
△	ECN No.:190802, 2.8 → 3.0	David	2019/08/21
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE