

MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5 P S 3 K S A 4 3 - 2 X X X X N N N T U - 0 0

2: Dual Row

No. of Pin
Per Row(02~50)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

N:W/O Peg

N:W/O Bump

T:Tube W/O Cap

N:N Type


RoHS



AMTEK 糧德

2022.07.21

Released DCC

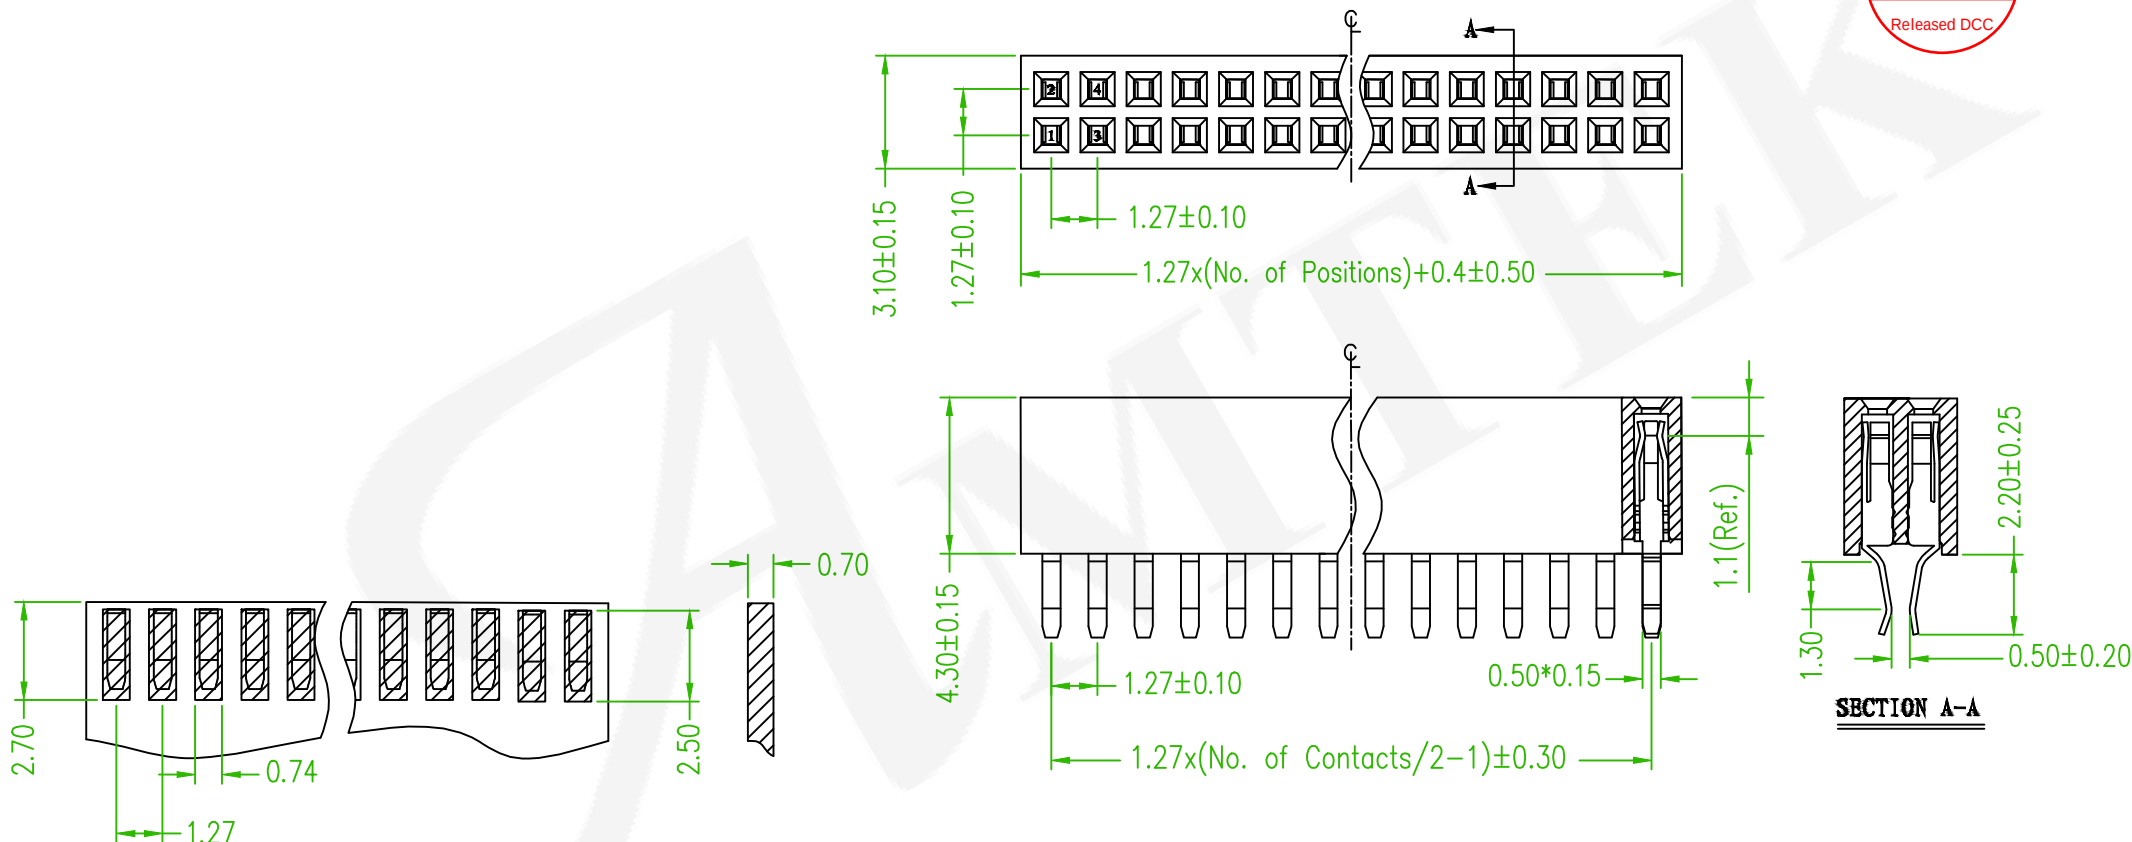

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 1.27mm				頁數 Page	1/1
	品號 PART NO.	5PS3KSA43-2XXXXNNNTU-00				繪圖 DRAWN	Benson 2022/07/21
	圖號 DRAWING NO.	GN003-BE048	版本 REV.	A	核對 CHECKED	Josh 2022/07/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2022/07/21	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X $^{\circ} \pm 3$	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------