

ORDER INFORMATION

SPECIFICATION

Current Rating:1 AMP

Insulation Resistance:1000MΩ Min

Contact Resistance:20mΩ Max

Dielectric Voltage:500V AC for one minute

Operation Temperature:-40°C to +105°C


MATERIAL

Insulator:High Temperature Thermoplastic, UL94V-0



Contact Pin:Copper alloy

5 P S 3 M H A 3 5 - 2 X X X X N X N X U - 0 0

2: Dual Row	No. of Pin Per Row(02~50)	◎G0: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u"	S0: Selective SA: 5u" SB: 10u" SC: 20u" SD: 30u"	N: W/O Peg P: Inner Peg N: W/O Bump	◎T: Tube, W/O Cap H: Tape & Reel, W/O Cap N: Non Type	RoHS
		T0: Tin Plated TE: Tin 200u"				

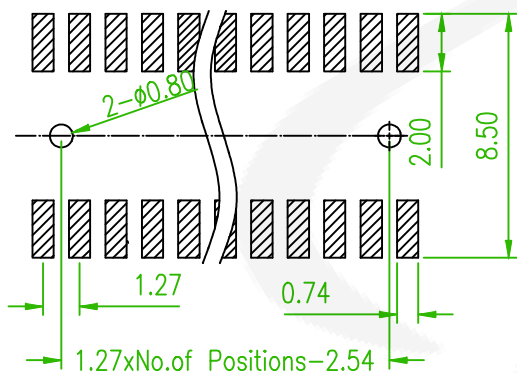

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

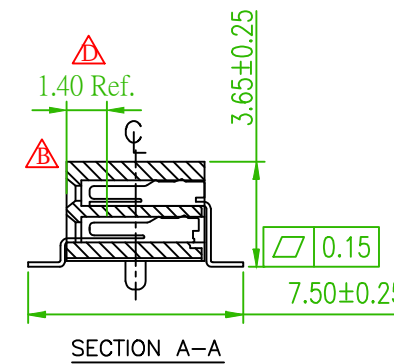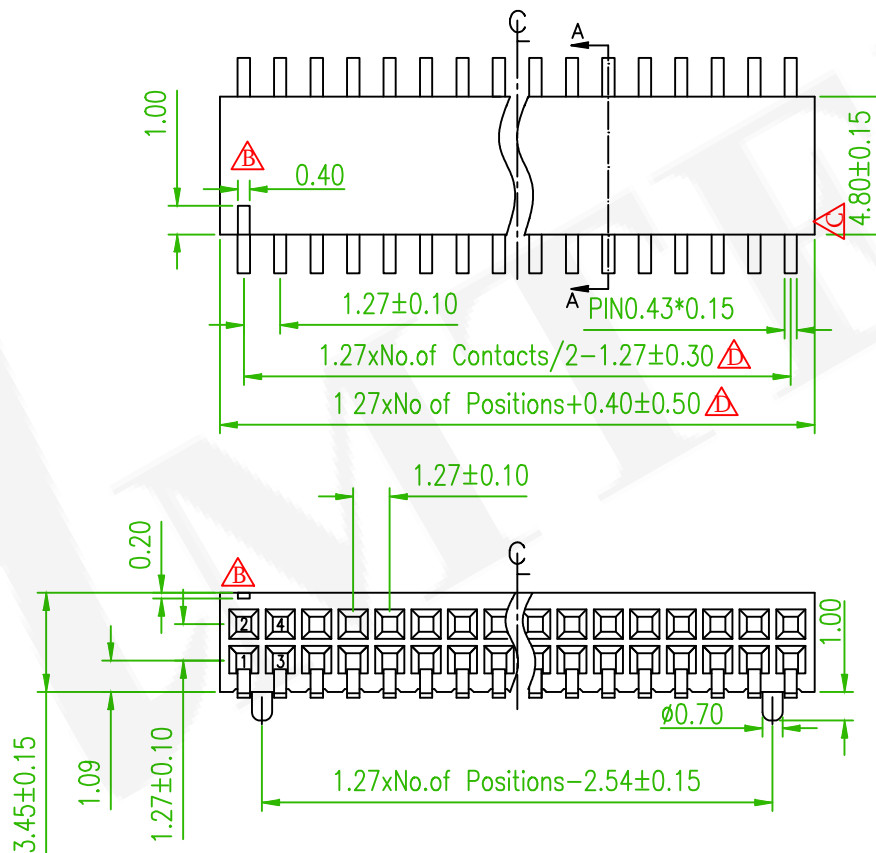

Old Part No. : PS3MS-2XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 1.27x1.27mm D/R R/A SMT TYPE				頁數 Page	1/1
	品號 PART NO.	5PS3MHA35-2XXXXNXXNXU-00				繪圖 DRAWN	Jeff 2015/08/31
	圖號 DRAWING NO.	GN003-RL795	版本 REV.	D	核對 CHECKED	John 2015/08/31	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/31	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	DESCRIPTION	REVISED	DATE
ΔX3	ECN No.:210404 , Revise the drawing	Alice	2021/04/27
ΔX1	ECR No.:180607 , Revise the Insulator Dim.	Mia	2018/07/18
ΔX4	ECN No.:170603 , Revise the Insulator	Roy	2017/06/15