


MATERIAL 
Insulator:Nylon9T+G.F,
UL94V-0, Black
Contact Pin:Phosphor Bronze


ORDER INFORMATION

5 P S 3 M S A 2 1 - 1 X X X X X X X U - 0 0

1:Single Row	No. of Pin Per Row(02~50)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg E:With outer Peg N:W/O Bump	X:Box R:T/R with cap C:Tube with cap	B:Bag H:T/R W/O cap T:Tube W/O cap	RoHS
				A:A Type B:B Type			

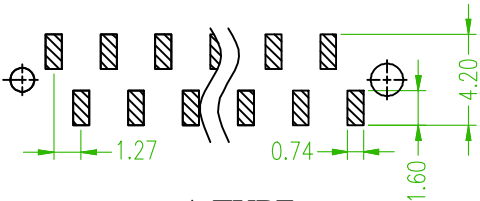


A TYPE

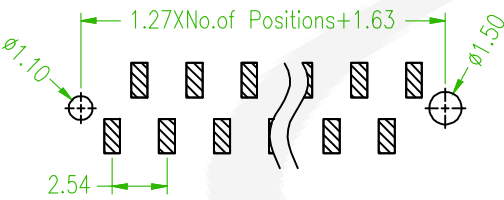


B TYPE



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

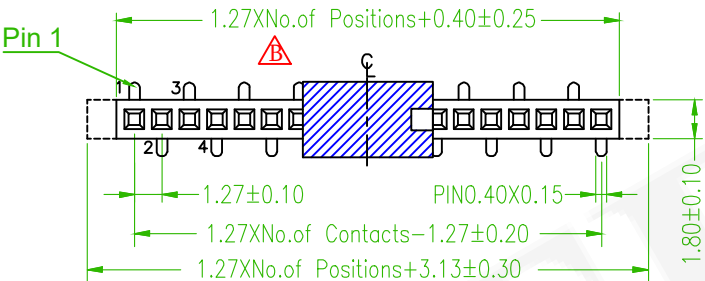

A TYPE

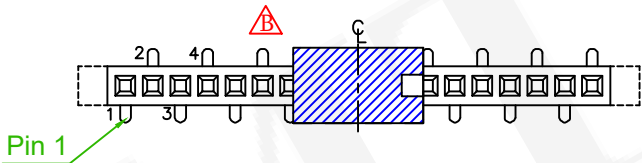

B TYPE

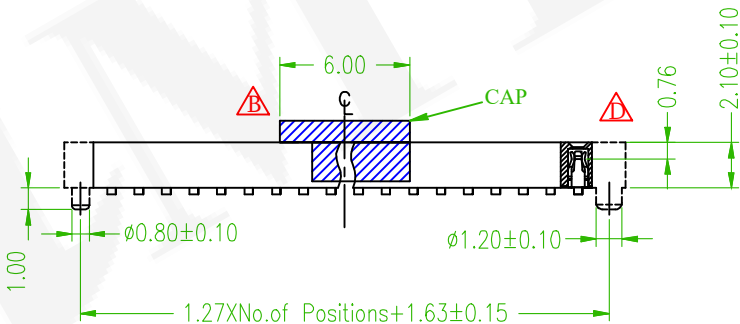

Old Part No. : PS3M21-1XX-U

 x6	ECN NO.:230414, Revise the Drawing & Specification	Rex	2023/05/04
 x1	add the recommended mating part.	Gary	2019/02/12
 x3	ECN NO.:170425, revise the Cap	Roy	2017/04/28
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27mm V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	 5PS3MSA21-1XXXXXXXXXU-00				繪圖 DRAWN	Roy 2015/08/25
圖號 DRAWING NO.	GN003-RL709	版本 REV.	D	核對 CHECKED	Josh 2019/02/12	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/12	
公差 TOLERANCE	.X ± 0.38  .X°±3 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		