

ORDER INFORMATION

SPECIFICATION

Current Rating: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL


Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
Contact Pin: Copper Alloy

5 P S 3 M S A 3 4 - 1 X X X X N N X X U - 0 0



1:Single Row	No. of Pin Per Row(04~40)	③G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	T0:Tin Plated TE:Tin 200u"	N:W/O Peg N:W/O Bump	X:Box R:T/R with cap C:Tube with cap M:T/R with Mylar	B:Bag H:T/R W/O cap T:Tube W/O cap	RoHS
						A:A Type B:B Type		



AMTEK 糧德
2022.08.04
Released DCC

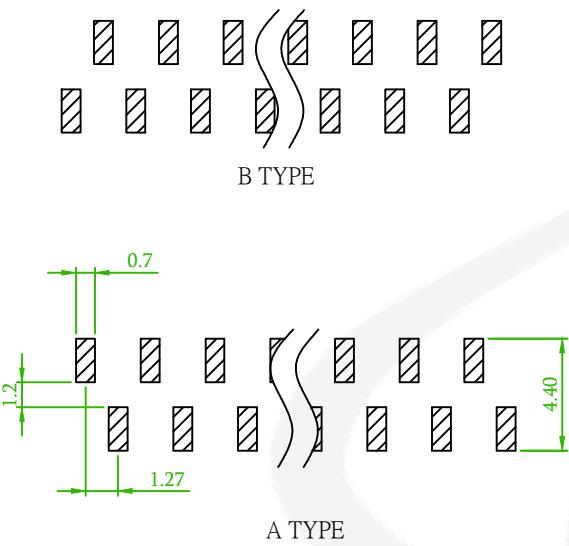

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

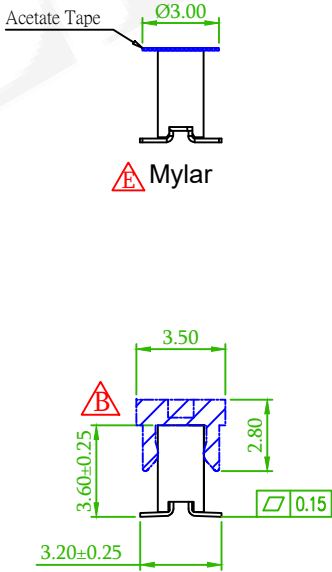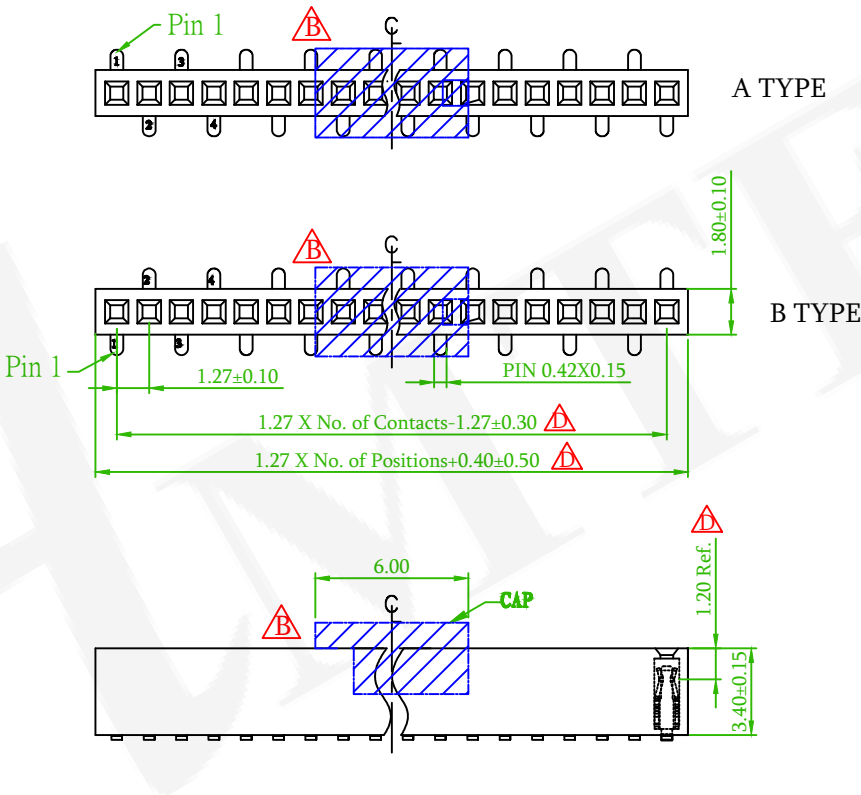

Old Part No. : PS3M34-1XX-U

△x2	Add the packing option.	Alice	2022/08/04
△x4	ECN 210210.: Revise the drawing	David	2021/03/19
△x1	Add the recommended mating part.	Gary	2019/02/13
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27mm S/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PS3MSA34-1XXXXNNXXU-00				繪圖 DRAWN	Roy 2015/08/25
圖號 DRAWING NO.	GN003-RL707	版本 REV.	E	核對 CHECKED	Josh 2019/02/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/13	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	