



MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze


ORDER INFORMATION

5 P S 3 M S A 3 4 - 2 X X X X N X N X U - 0 0


2: Dual Row	No. of Pin Per Row(02~50)	GA:5u" SA:5u" GB:10u" SB:10u" GC:20u" SC:20u" GD:30u" SD:30u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg E:With outer Peg P:With inner Peg N:W/O Bump	R:T/R with cap C:Tube with cap	H:T/R W/O cap T:Tube W/O cap	RoHS
		T0: Tin Plated TE: Tin 200u"			N:N Type		

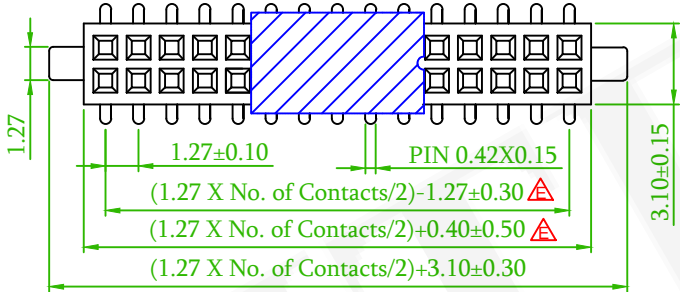



AMTEK 耀德
2021.11.01
Released DCC




Outer Peg



Inner Peg

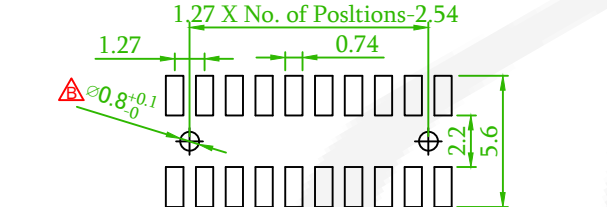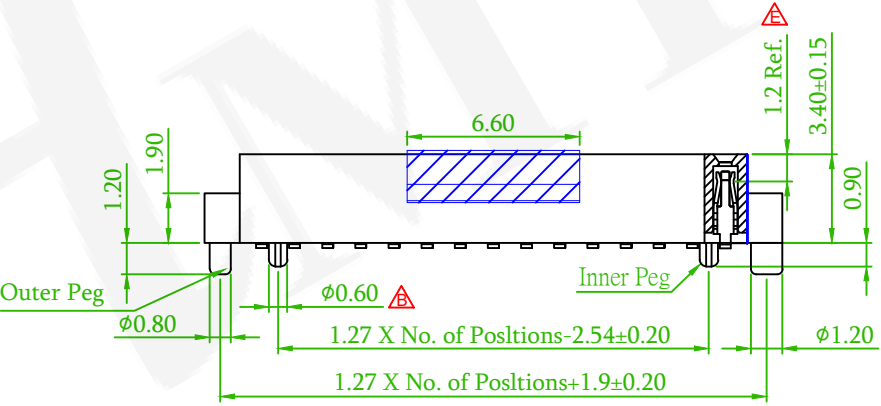

Inner Peg

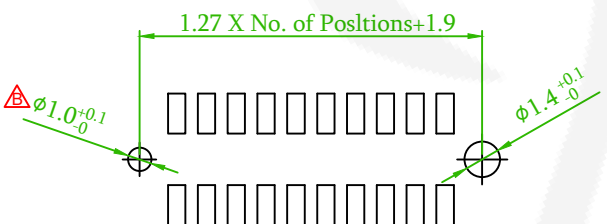

Outer Peg

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PS3M34-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/21
△x4	ECN NO.:210805 Revise the drawing	Alice	2021/08/31
△x1	Add the recommended mating part.	Gary	2019/02/13

AMTEK
耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27mm D/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PS3MSA34-2XXXXNXXNXU-00				繪圖 DRAWN	Roy 2015/08/31
圖號 DRAWING NO.	GN003-MD130	版本 REV.	F	核對 CHECKED	Josh 2019/02/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/13	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	