


MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION


5 P S 3 M S A 4 4 - 1 X X X X N X X X U - 0 0

1:Single Row	No. of Pin Per Row(02~50)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" S0:Selective SA:5u" SB:10u" SC:20u" SD:30u" T0:Tin Plated TE:Tin 200u" 	N:W/O Peg E:With outer Peg N:W/O Bump 	R:T/R with cap C:Tube with cap H:T/R W/O cap T:Tube W/O cap 	RoHS
				A:A Type B:B Type	

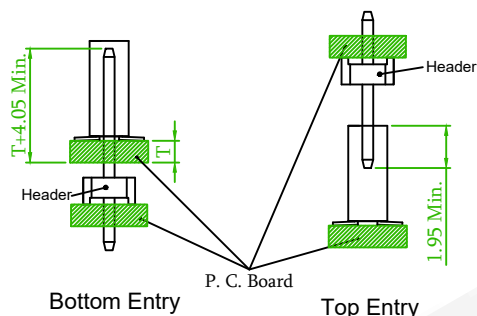


Recommended Mating Part


A TYPE

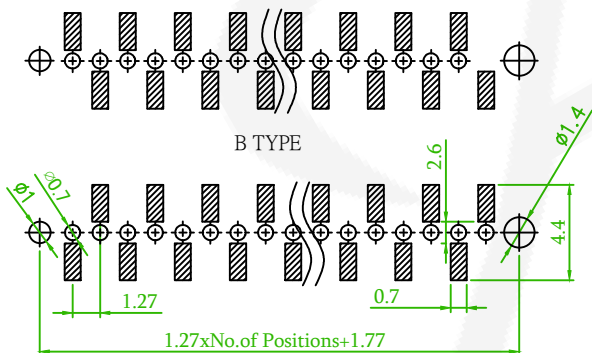


Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

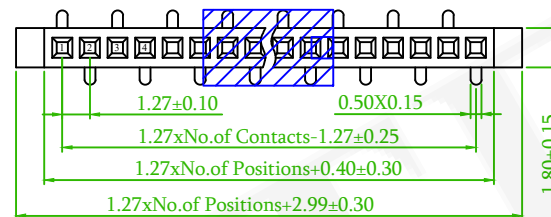


A TYPE



B TYPE

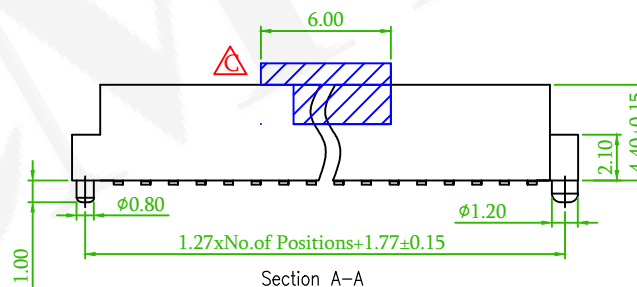

Section A-A



Old Part No. : PS3M44-1XX-U

△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/21
△x1	Add the recommended mating part.	Gary	2019/02/13
△x1	Revise the PCB Layout	Mia	2018/05/03
△x1	ECN NO.:ECR-170425,Revise the Cap	Roy	2017/04/28
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE		FEMALE HEADER 1.27mm S/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PS3MSA44-1XXXXNXXXU-00	繪圖 DRAWN	Roy 2015/08/25				
圖號 DRAWING NO.	GN003-RL275	版本 REV.	F	核對 CHECKED	Josh 2019/02/13		
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/13		
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	.X $^{\circ} \pm 3$	單位 UNIT	mm	THIRD ANGLE PROJECTION		