

ORDER INFORMATION

SPECIFICATION


Current Rating: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
Contact Pin: Copper Alloy

5 P S 3 M S B 2 1 - 2 X X X X X X X U - 0 0

2: Dual Row	No. of Pin Per Row(04~50)	◎G0: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u"	S0: Selective SA: 5u" SB: 10u" SC: 20u" SD: 30u"	T0: Tin Plated TE: Tin 200u"	N: W/O Peg P: With Peg N: W/O Bump	T: Tube W/O Cap C: Tube With Cap R: T/R With Cap N: N Type	RoHS
-------------	---------------------------	--	--	---------------------------------	--	---	------

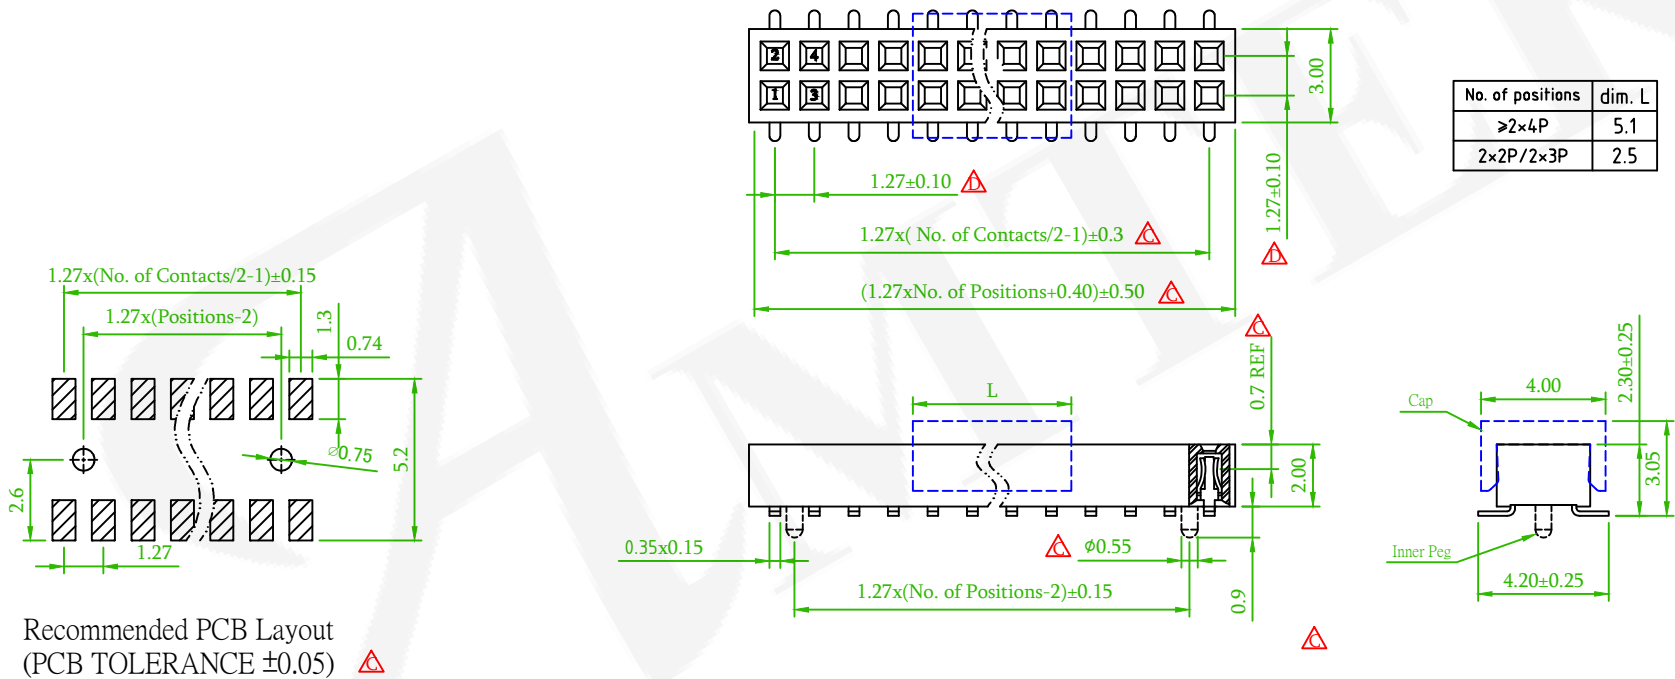

Old Part No. : PS3M21-2XX-U

△x2	ECN NO.230523: Revise the drawing	Alice	2023/06/19
△x7	ECN NO.210532: Revise the drawing	David	2021/06/15
△x1	Add the recommended mating part.	Gary	2019/02/12
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PS3MSB21-2XXXXXXXU-00				繪圖 DRAWN	Roy 2017/02/10
圖號 DRAWING NO.	GN005-RL441	版本 REV.	D	核對 CHECKED	Josh 2019/02/12	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/12	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	