ORDER INFORMATION

SPECIFICATION

Current Rating: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black
Contact:Copper Alloy

5 P S 3 R D B 4 4 - 2 X X X X N N N X U - 0 0

- 2: 2:Dual Row
- No. of Pin Per Row: No. of Pin Per Row(02~50)
- X X: ◎G0:Gold Flash / S0:Selective; GA:5u" / SA:5u"; GB:10u" / SB:10u"; GC:20u" / SC:20u"; GD:30u" / SD:30u"; T0:Tin Plated; TE:Tin 200u"
- N: N:W/O Bump
- N: N:W/O Peg
- N: N:Non Type
- X: ◎T:Tube, W/O Cap; H:Tape & Reel,W/O Cap
- U: RoHS
- 0 0

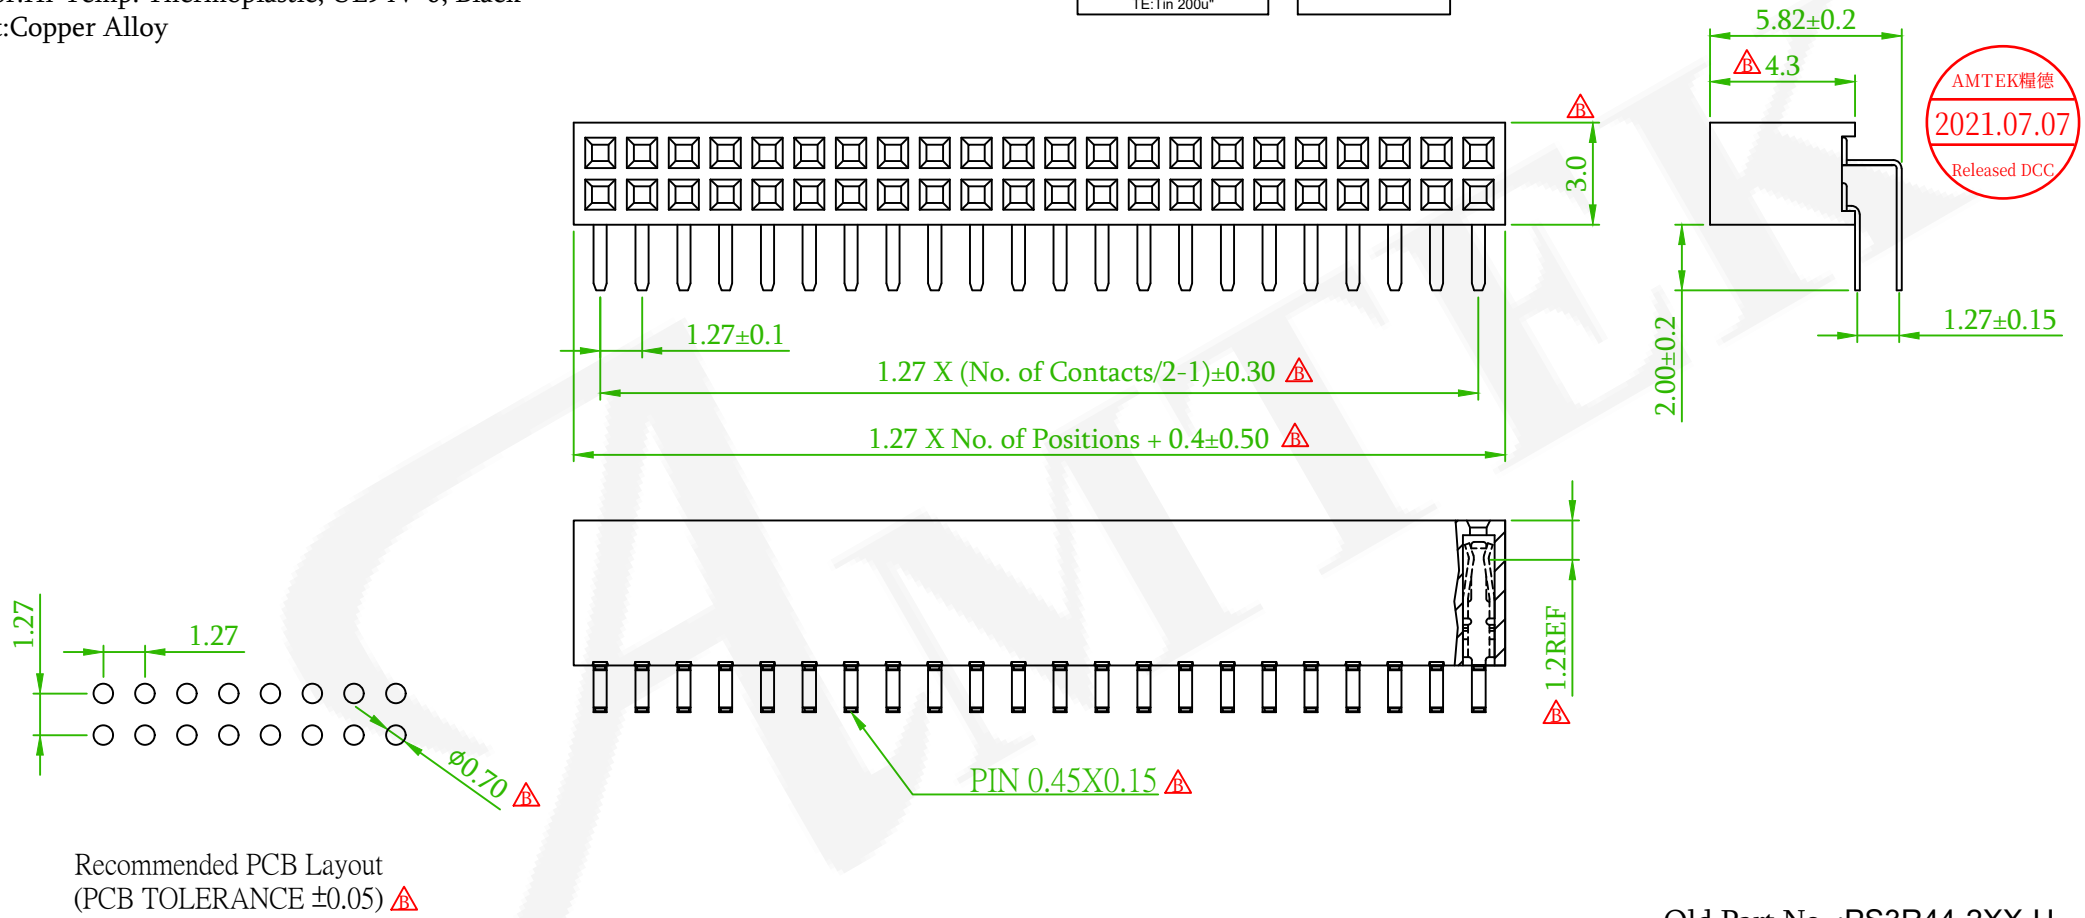

AMTEK糧德
2021.07.07
Released DCC

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. :PS3R44-2XX-U

REV.	DESCRIPTION	REVISED	DATE
B x8	ECN NO.210614: Revise the drawing	David	2021/07/07

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27x1.27mm			頁數 Page	1/1
品號 PART NO.	5PS3RDB44-2XXXXNNNXU-00			繪圖 DRAWN	Roy 2016/10/04
圖號 DRAWING NO.	GN147-DW505	版本 REV.	B	核對 CHECKED	Jonnny 2016/10/04
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/04
公差 TOLERANCE	.X ±0.38 .XX ±0.25 .X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	