

SPECIFICATION

Current Rating: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature:-40°C to +105 °C

MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black
Contact Pin:Copper Alloy

ORDER INFORMATION

5 P S 3 S D A 3 4 - 2 X X X X N N N X U - 0 0

◎:Standard Recommend

2: Dual Row

No. of Pin
Per Row(02~50)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

N:W/O Peg

N:W/O Bump

T:Tube W/O Cap

C:Tube With Cap

N:Non Type


RoHS



AMTEK 耀德

2021.02.04

Released DCC

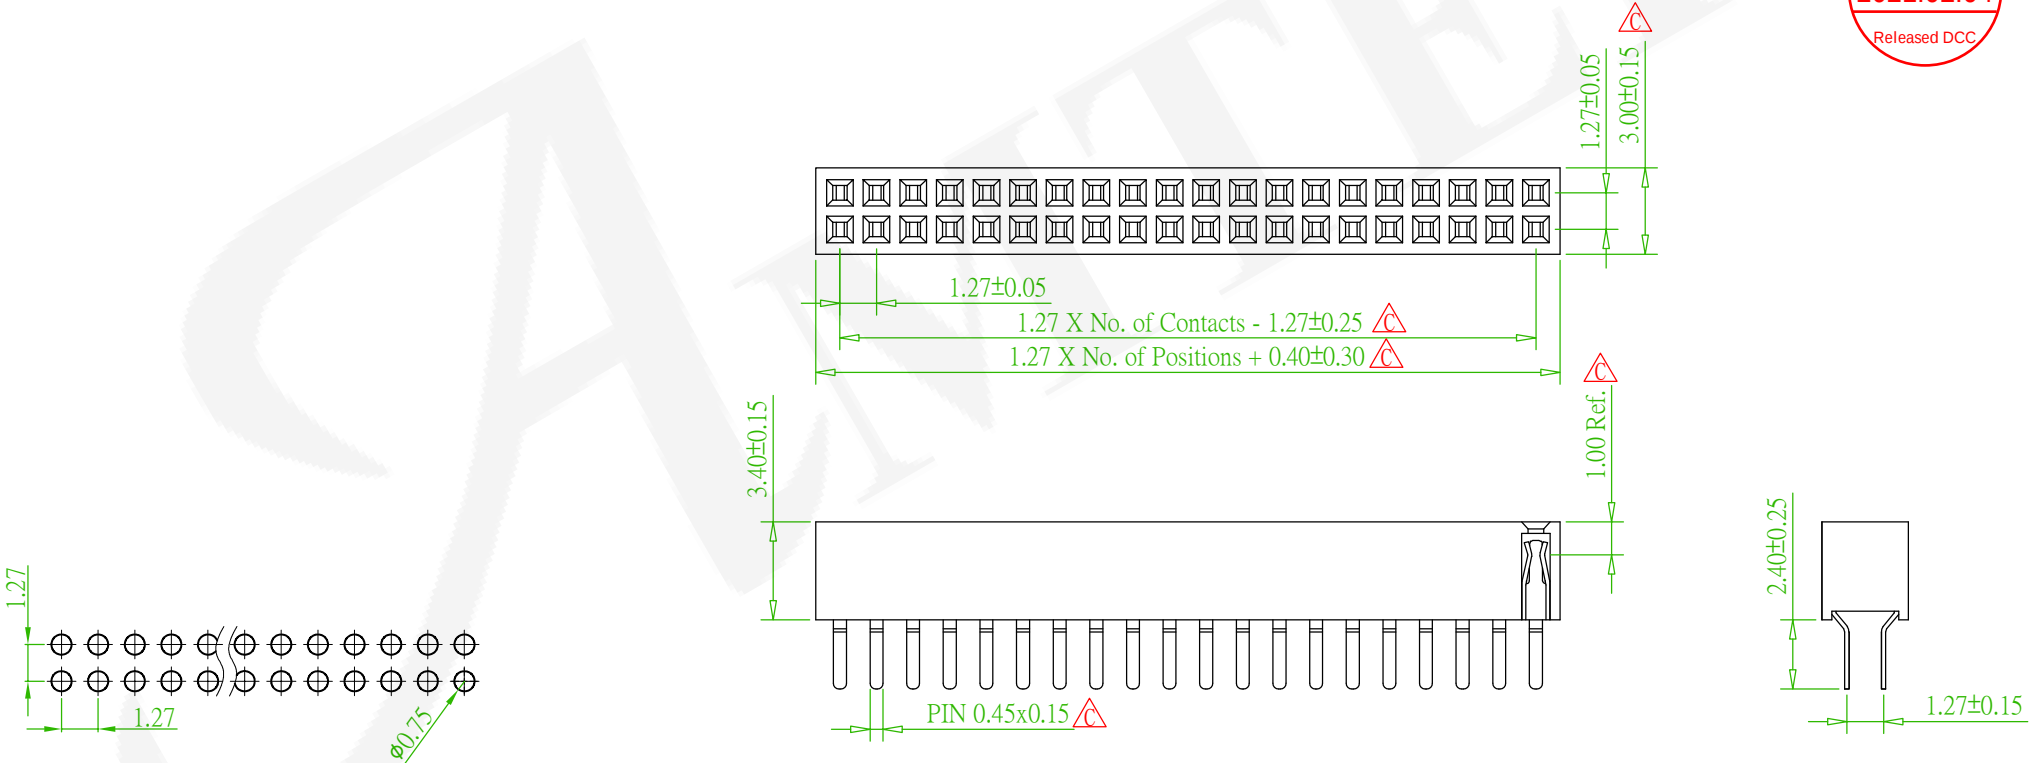

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PS3S34-2XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 1.27x1.27mm D/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PS3SDA34-2XXXXNNNXU-00				繪圖 DRAWN	Roy 2017/04/06
	圖號 DRAWING NO.	GN003-RL645	版本 REV.	C	核對 CHECKED	Josh 2018/10/18	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/10/18	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x6	ECN NO.:210112 Revise the Drawing	Benson	2021/02/04
△x1	Add the Package	Mia	2018/10/18