

ORDER INFORMATION

SPECIFICATION

Current Rating: 1 AMP

Insulation Resistance: 1000 MΩ Min.

Contact Resistance: 20m Ω Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature:-40°C to +105 °C

MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin:Copper Alloy

5 P S 3 S D A 4 4 - 1 X X X X N N N X U - 0 0

1:Single Row

No. of Pin
Per Row(02~40)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	


N:W/O Peg

N:W/O Bump

T:Tube W/O Cap
X:Box
H:T/R W/O Cap

N:Non Type

RoHS

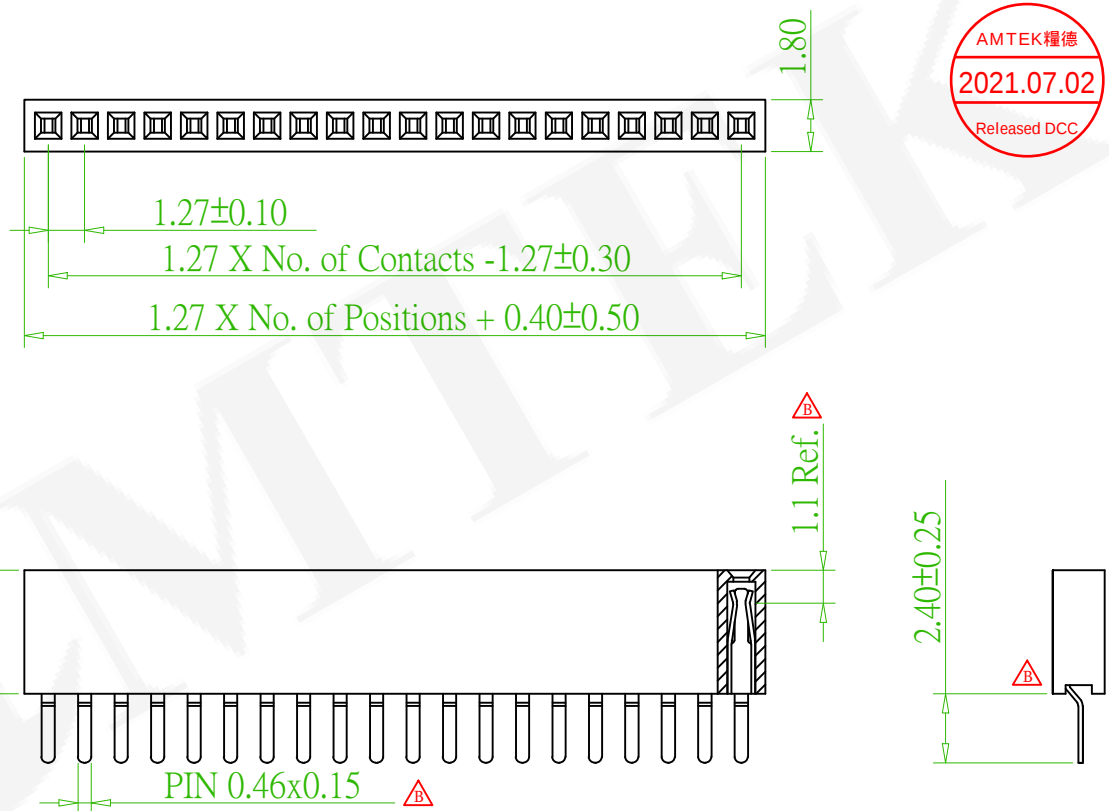

Old Part No. : PS3S44-1XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 1.27x1.27mm				頁數 Page	1/1
	品號 PART NO.	5PS3SDA44-1XXXXNNNXU-00				繪圖 DRAWN	Jeff 2016/09/19
	圖號 DRAWING NO.	GN003-DW429	版本 REV.	B	核對 CHECKED	Johnny 2016/09/19	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO.210632: Revise the drawing	David	2021/07/02
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE