

MATERIAL

Insulator:Hi-Temp. Thermoplastic,
UL94V-0, Black
Contact Pin:Copper Alloy

ORDER INFORMATION

5 P S 3 S D A 4 4 - 2 X X X X X X U - 0 0

2:Dual Row

No. of Pin
Per Row(02~50)

G0:Gold Flash
GA:5u"
GB:10u"
GC:20u"
GD:30u"

S0:Selective
SA:5u"
SB:10u"
SC:20u"
SD:30u"

N:W/O Peg

N:W/O Bump

T:Tube W/O Cap

R:T/R With Cap


X:Box

N:Non Type




RoHS



AMTEK 耀德
2023.04.21
Released DCC

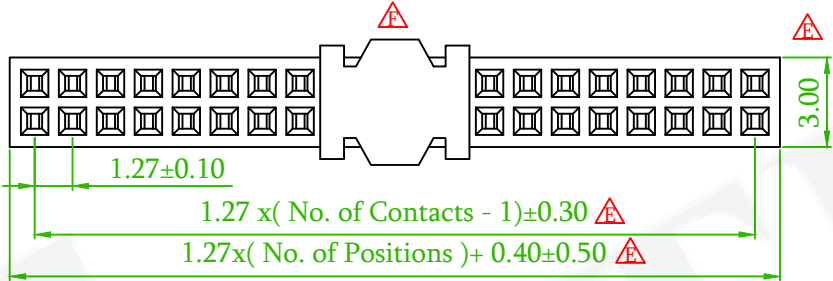

DIM.C	NOTE
4mm	02~03PIN
5mm	04~50PIN

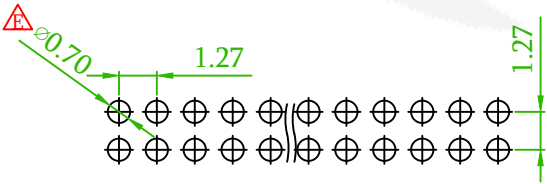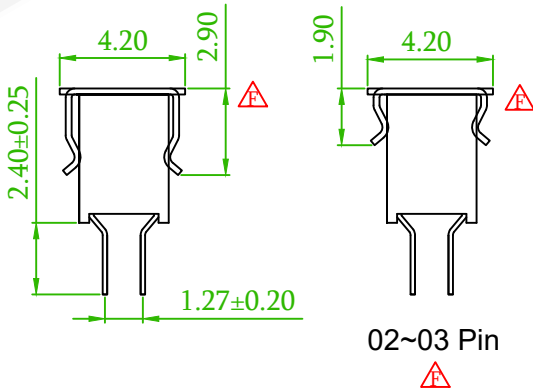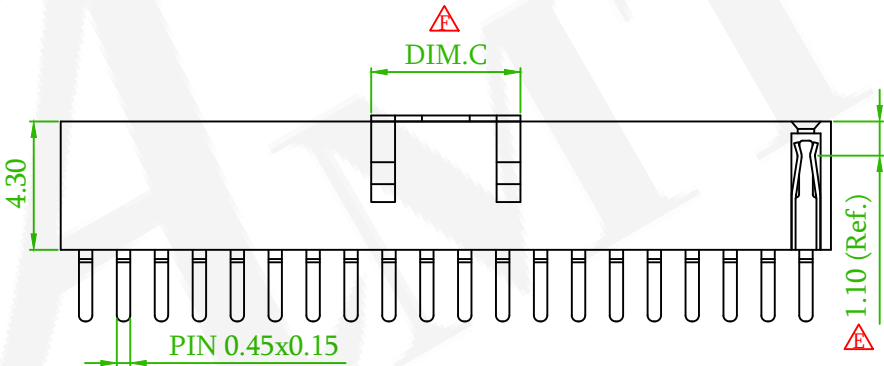

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PS3S44-2XX-U

△x5	Add the Box With Cap Option	Rex	2023/04/21
△x9	Add the Cap size & T/R With Cap option	Alice	2022/02/14
△x6	ECN NO: 210662 Revise the Drawing	Benson	2021/08/09
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27x1.27mm				頁數 Page	1/1
品號 PART NO.	△5PS3SDA44-2XXXXXXXXXU-00				繪圖 DRAWN	Jeff 2016/09/19
圖號 DRAWING NO.	GN003-RL866	版本 REV.	G	核對 CHECKED	Johnny 2016/09/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		