

SPECIFICATION

Current Rating: 1 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0

Contact Pin: Copper Alloy

ORDER INFORMATION

5 P S 3 S H A 3 4 - 2 X X X X N N N T U - 0 0

◎: Standard Recommend

2: Dual Row

No. of Pin
Per Row (02~50)

G0: Gold Flash

GA: 5u"

GB: 10u"

GC: 20u"

GD: 30u"

T0: Tin Plated

TE: Tin 200u"

S0: Selective

SA: 5u"

SB: 10u"

SC: 20u"

SD: 30u"

N: W/O Peg

N: W/O Bump


T: Tube W/O Cap

N: Non Type

RoHS



Amtek
2017.12.11
文管中心

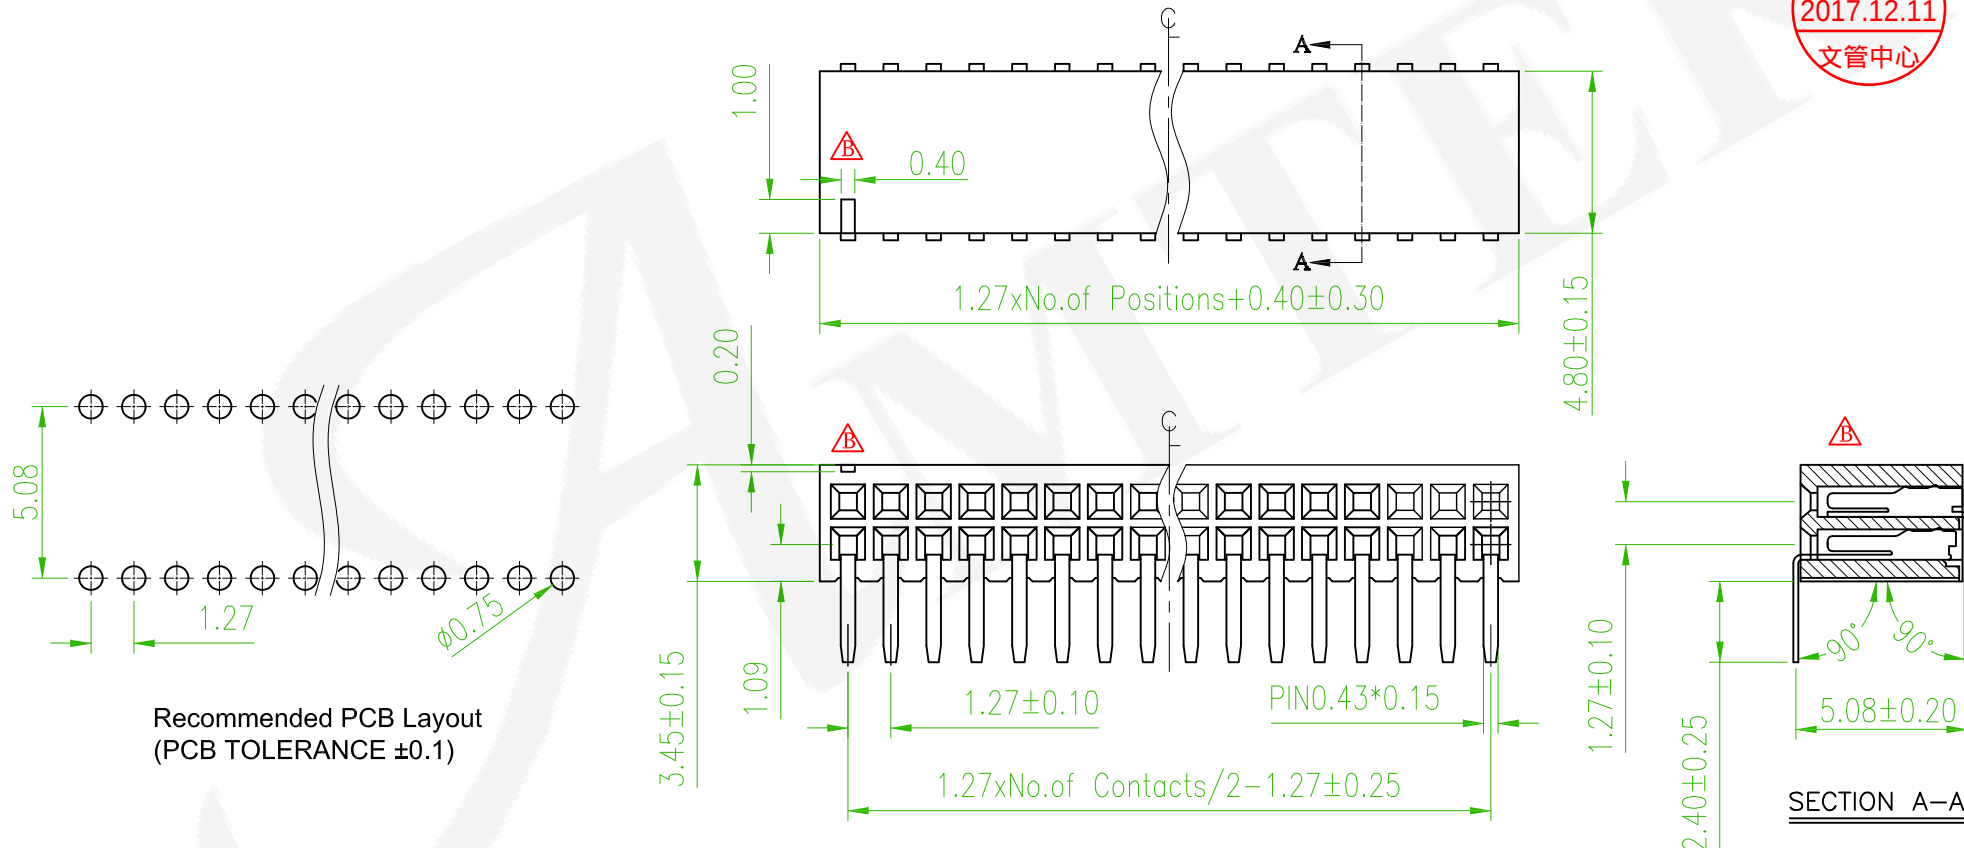

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. : PS3RS-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B	ECN No.:170603 , Revise the Insulator	B	2017/06/15 Roy


Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27x1.27mm				頁數 Page	1/1
品號 PART NO.	5PS3SHA34-2XXXXNNTU-00			繪圖 DRAWN	Jeff 2012/008/17	
圖號 DRAWING NO.	GN003-RL143	版本 REV.	B	核對 CHECKED	Yvonne 2012/008/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2012/008/17	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		