

SPECIFICATION



Current Rating: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL


Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 P S 4 M S B 5 7 - 1 X X X X N N X X U - 0 0

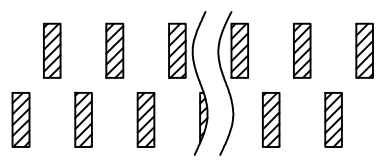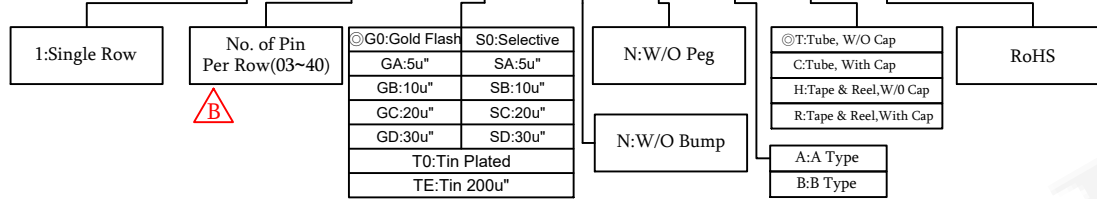


B Type

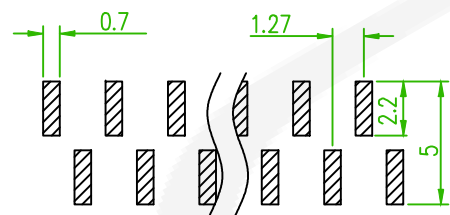


A Type



Recommended PCB Layout
 (PCB TOLERANCE ±0.05) △

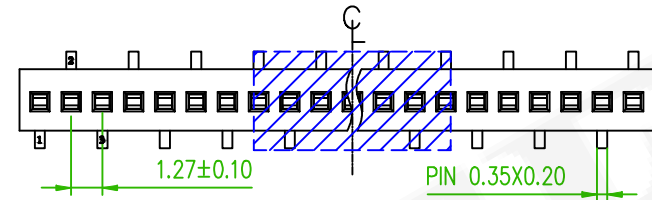

B Type

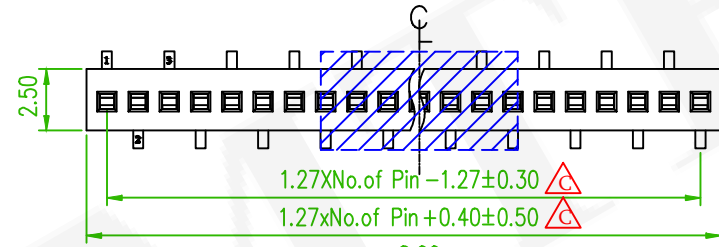

A Type

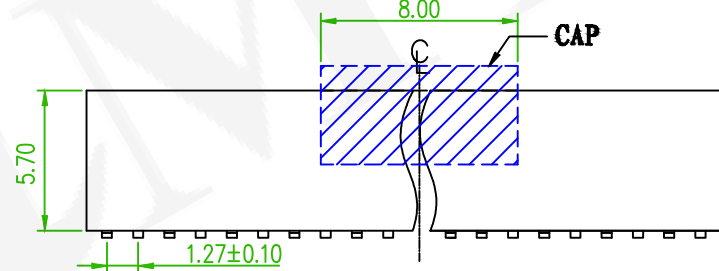

Old Part No. : PS4M58-1XX-U

△ x5	ECN NO.210626: Revise the drawing	David	2021/07/01
△ Bx1	QEC NO.:190918 Revise the No. of Pin	David	2019/10/15
REV.	DESCRIPTION	REVISED	DATE

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27mm S/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PS4MSB57-1XXXXNXXU-00			繪圖 DRAWN	Nick 2019/08/23	
圖號 DRAWING NO.	GN016-NI315	版本 REV.	C	核對 CHECKED	Josh 2019/08/23	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/08/23	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	