

# ORDER INFORMATION






## SPECIFICATION

Current Rating: 1 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature:-40°C to +105°C

## MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0  
 Contact Pin:Copper Alloy

5 P S 4 S D A 8 5 - 2 X X X X N N N X U - 0 0

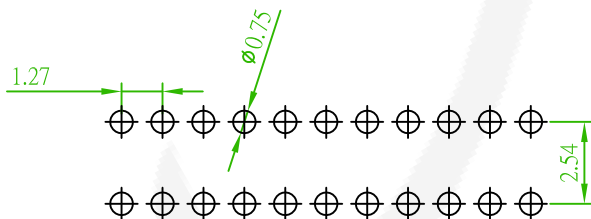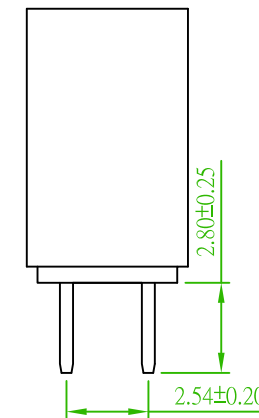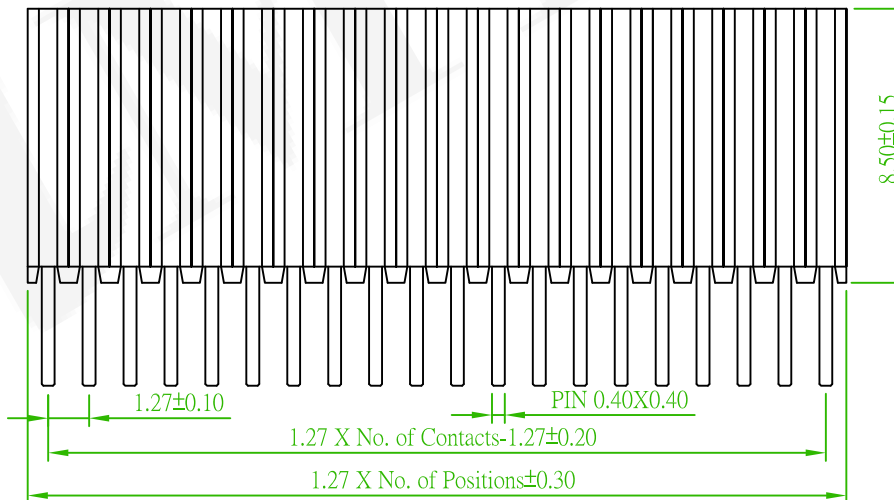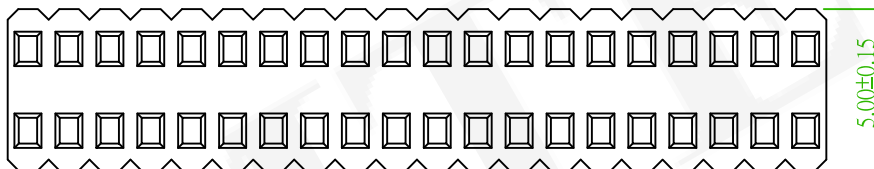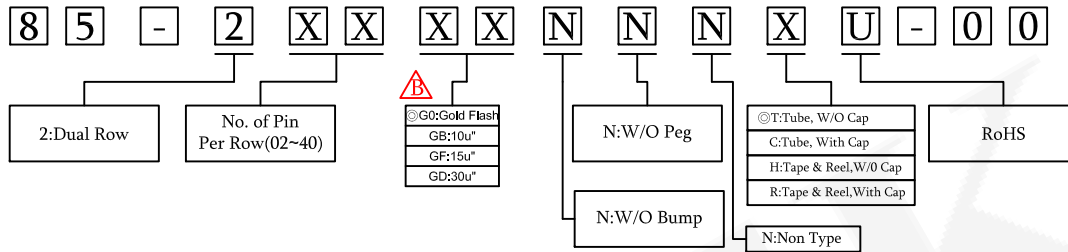

Recommended PCB Layout  
 (PCB TOLERANCE ±0.1)

Old Part No. : PS4S85-2XX-U

△	Revise the drawing	B	2016/07/01 Roy
REV.	DESCRIPTION	REVISED	DATE

耀德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27mm			頁數 Page	1/1
品號 PART NO.	5PS4SDA85-2XXXXNNNXU-00			繪圖 DRAWN	Jeff 2015/08/31
圖號 DRAWING NO.	版本 REV.	B	核對 CHECKED	John 2015/08/31	
客戶品號 CUSTOMER P/N	比例 SCALE	None	承認 APPROVED	John 2015/08/31	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION