

MATERIAL

Insulator: Nylon9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5P5MSA21-2XXXXU-00

2:Dual Row

No. of Contact Per Row (02~50)

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0: Tin Plated

TE: Tin 200u"

N:W/O Peg

P:With Peg

N:W/O Bump

X

N:NON Type

T:Tube, W/O Cap




C:Tube, With Cap

H:Tape & Reel, W/O Cap

R:Tape & Reel, With Cap

RoHS

AMTEK 糧德
2023.12.12
Released DCC

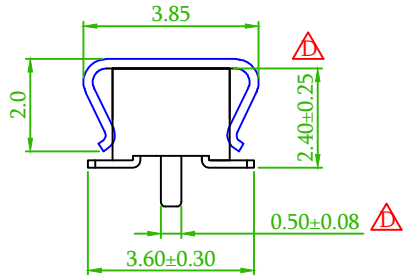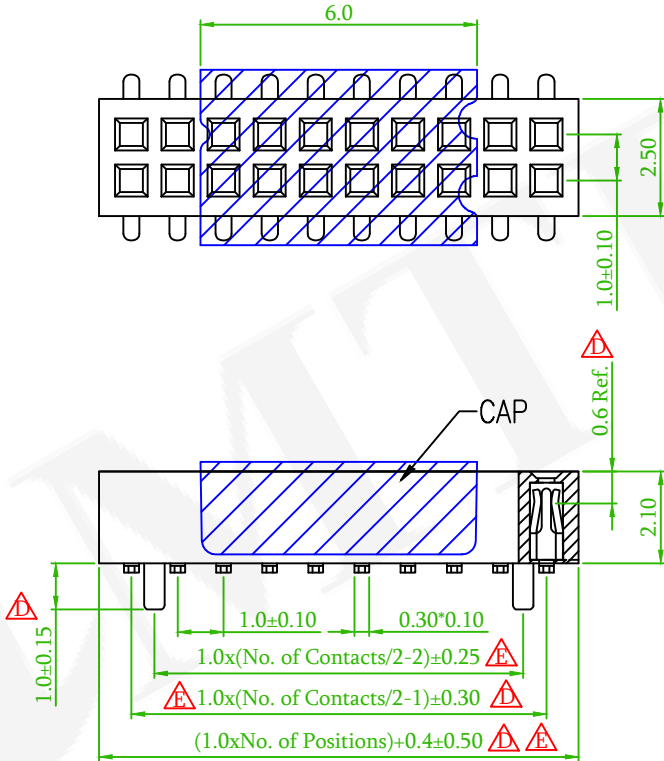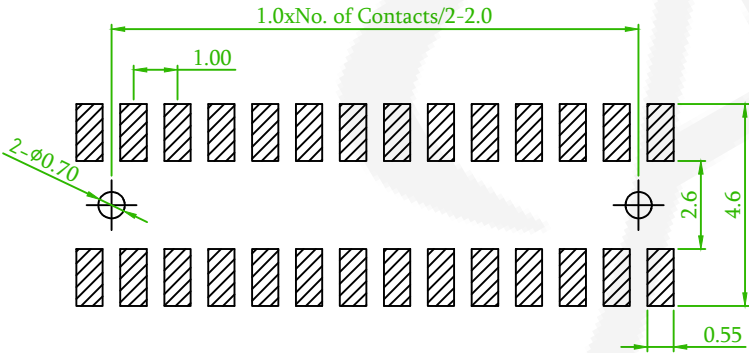

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.:PS5M21-2XX-U

ECN NO.:231005 Revise the drawing & EasyFlow: 202312110001	Alice	2023/12/12
ECN NO.210721: Revise the drawing	David	2021/07/30
Remove : Recommended Mating Part & Bottom entry	David	2020/09/23
REV.	ECN NO. OR DESCRIPTION	REVISED DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		FEMALE HEADER 1.0mm D/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.		5PS5MSA21-2XXXXXXXU-00		繪圖 DRAWN	Erin	2015/08/07	
圖號 DRAWING NO.		GN003-RR868	版本 REV.	E	核對 CHECKED	Josh	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason	
公差 TOLERANCE		.X ± 0.38 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	