

ORDER INFORMATION





SPECIFICATION

Current Rating:0.75 AMP Δ
 Insulation Resistance:1000 M Ω Min
 Contact Resistance:20m Ω Max
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C


MATERIAL

Insulator:High Temperature Thermoplastic, UL94V-0 , Black
 Contact Pin:Copper alloy


5 P S 6 M S A 3 1 - 2 X X X X N X N X U - 0 0

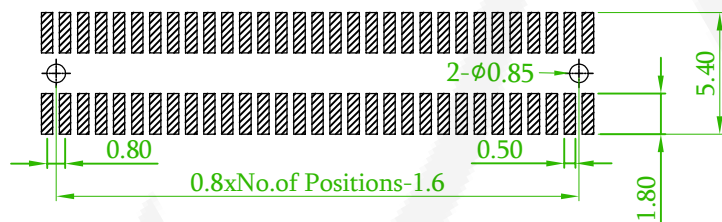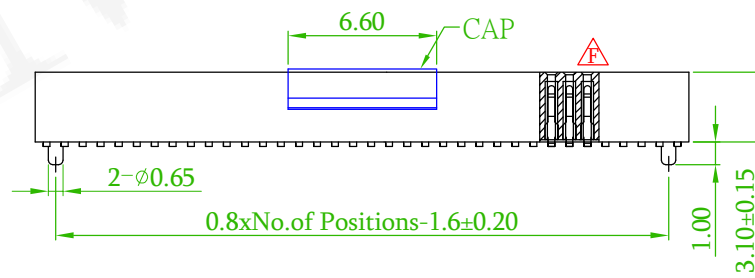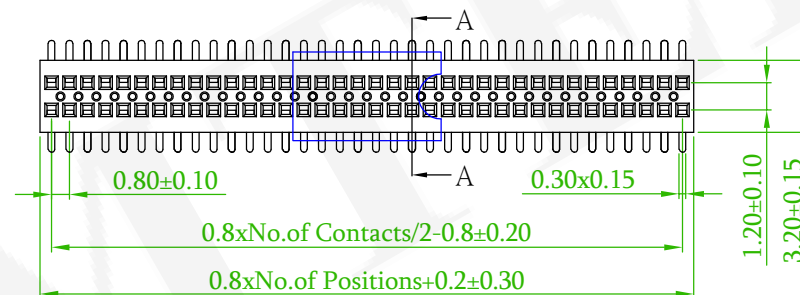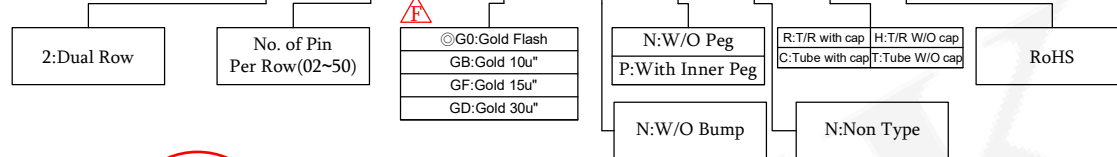


Recommended PCB Layout
 (PCB TOLERANCE $\pm$ 0.1)



Δ Cap for 2x02-2x07




WITHOUT PEG



WITH PEG

Old Part No. : PS6M31-2XX-U

品名 TITLE				FEMALE HEADER 0.8mm D/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.				5PS6MSA31-2XXXXNXXNXU-00				繪圖 DRAWN	Erin 2015/08/26
圖號 DRAWING NO.				GN003-MC885		版本 REV.	F	核對 CHECKED	Josh 2018/10/04
客戶品號 CUSTOMER P/N						比例 SCALE	None	承認 APPROVED	Jason 2018/10/04
公差 TOLERANCE				.X $\pm$ 0.20 .XX $\pm$ 0.15		單位 UNIT	mm	THIRD ANGLE PROJECTION	



REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Δ X3	ECN NO.:200905 Revise the Plating & add the Contact point	Benson	2020/10/08
Δ X1	Add the Recommended Terminal	Roy	2018/10/04
Δ X1	Add the Cap: 2x02 - 2x07	Roy	2018/08/20
Δ X2	ECN NO.:171225, Revised the Dim.4.96->4.76	Mia	2018/01/15