

ORDER INFORMATION



SPECIFICATION

Current Rating: 7 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C



MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy



5 P S 9 M S A 8 9 - 1 X X X X N N N X U - 0 0

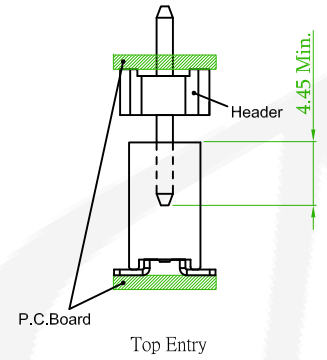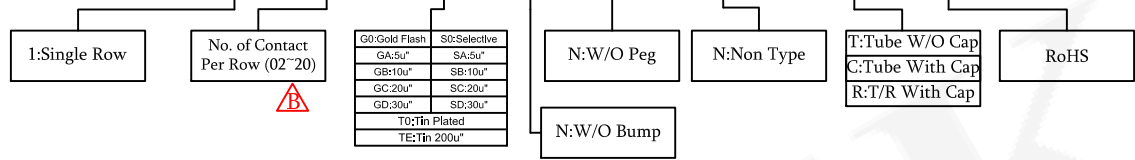

△ Recommended Mating Part

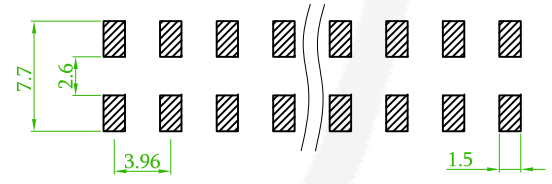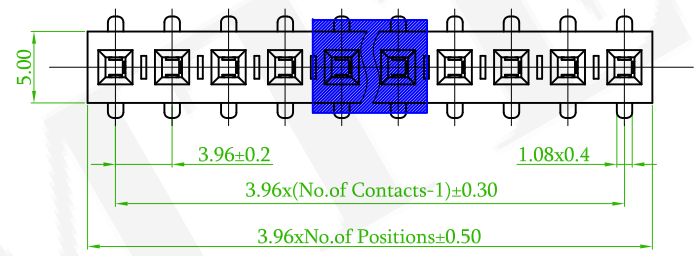

Recommended PCB Layout (PCB TOLERANCE ±0.1)

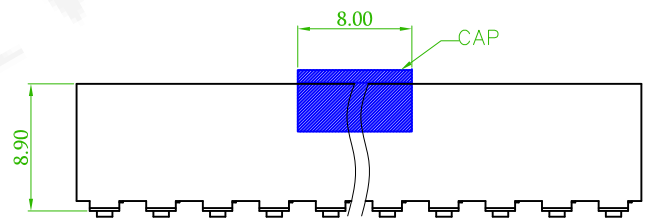

Old Part No.: PS396M89-1XX-U

△x1	Add the Recommended Mating Part	Roy	2018/10/04
△x1	ECN No.:170627, Revise the No. of Contact Per Row: 02~30 -> 02~20	Roy	2017/07/19
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 3.96mm S/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PS9MSA89-1XXXXNNNXU-00				繪圖 DRAWN	Erin 2015/08/26
圖號 DRAWING NO.	GN003-RL871	版本 REV.	C	核對 CHECKED	Josh 2018/10/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/10/04	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		