
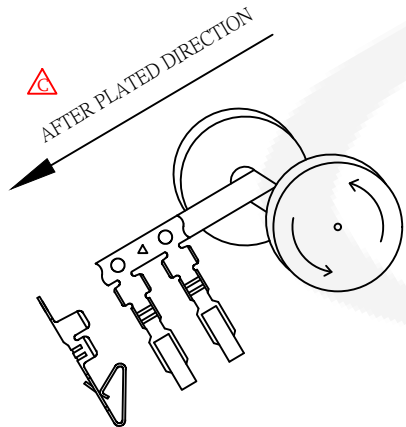
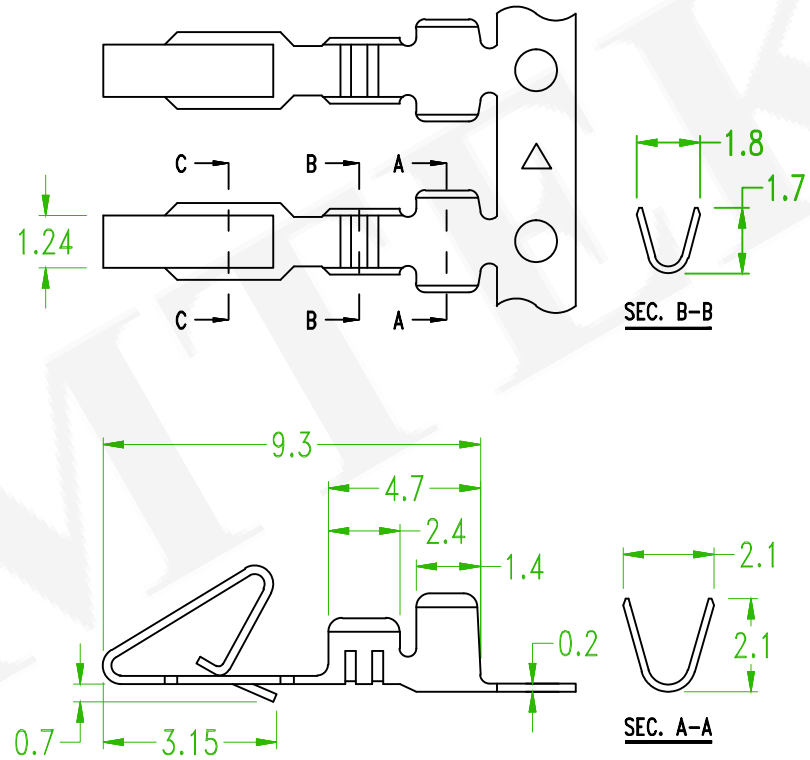


ORDER INFORMATION

Specification:

- Current rating: 3A
- Voltage rating: 250V AC, DC Max.
- Contact resistance: 20mΩ Max.
- Engagement force: 500g Max. with tin-plated .025"(0.64mm) square pin
- Disengagement Force: 87g Min. for first cycle with tin-plated .025"(0.64mm) square pin
- Terminal retention force: 1.5Kg Min.
- Crimp strength: #22 4.0 Kg Min.
#24 3.0 Kg Min.
#26 2.0 Kg Min.
- Ambient temperature range: -40°C ~ 105°C

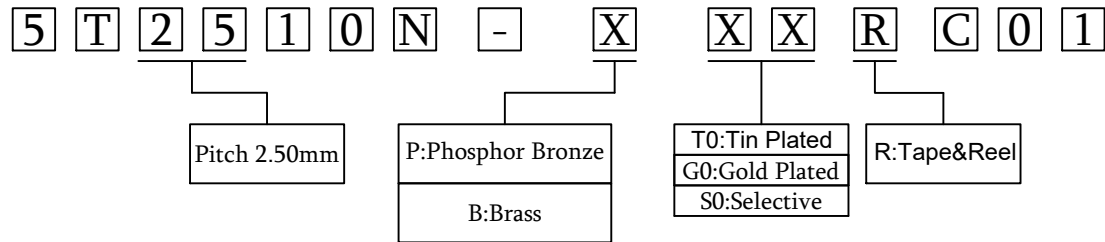

Old Part No.:2510-T-L

P/N	Wire Range	Material	Finish
5T2510N-BT0BC01	AWG#22-#26	Brass	Tin-plated
5T2510N-BS0BC01	AWG#22-#26	Brass	Selective
5T2510N-PT0BC01	AWG#22-#26	Phosphor Bronze	Tin-plated
5T2510N-PG0BC01	AWG#22-#26	Phosphor Bronze	Gold-plated

△X1	Add the after plated direction	Tim	2022/10/07
△B	Revised the Drawing	B	2016/11/08
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.50mm TERMINAL			頁數 Page	1/1
	品號 PART NO.	5T2510N-XXXRC01			繪圖 DRAWN	Mia 2016/06/17
	圖號 DRAWING NO.	GW083-JF006	版本 REV.	C	核對 CHECKED	David 2016/06/17
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/06/17
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	