

SPECIFICATIONS

Current Rating: 3A AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Contact Material: Phosphor bronze
Wire Range: AWG#20~#24
Insulation O.D.: 1.55mm(max)

ORDER INFORMATION

5 T 2 5 5 3 N - P

P: Phosphor Bronze

T 0 R M 0 1

T0: Tin Plated


R: Tape & Reel




AMTEK 耀德

2022.11.03



Released DCC

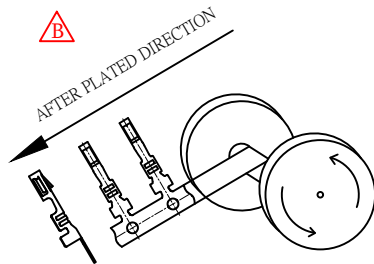

Section A-A



Section B-B

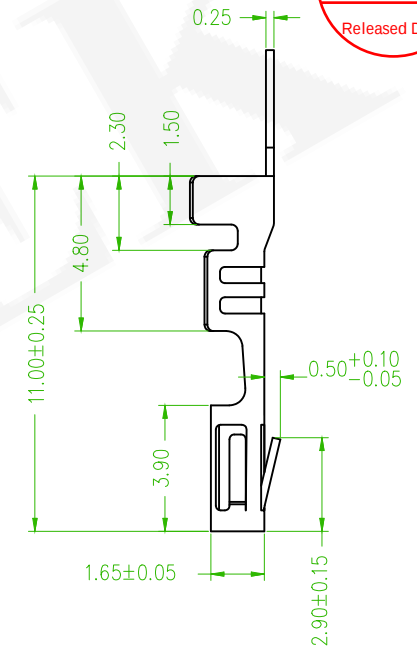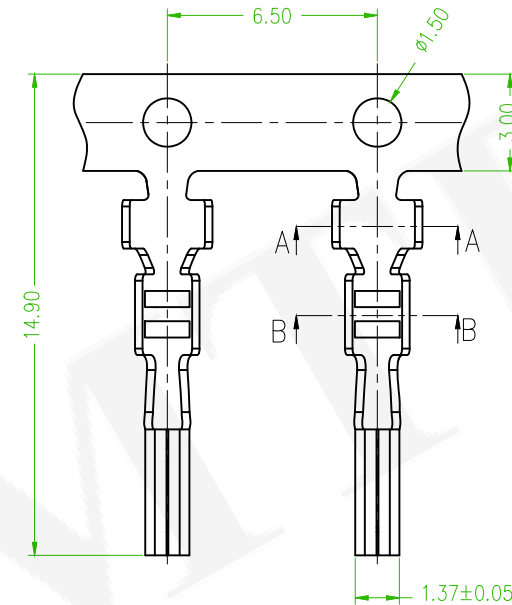

Old Part No.: 2553-T-L

Part No	Wire Range	Insulation O.D.	Material	Finish
5T2553N-PT0RM01	AWG#20-#24	1.55mm(max)	Phosphor Bronze	Tin-plated

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△	Add the after plated direction	Tim	2022/09/12


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.54mm TERMINAL				頁數 Page	1/1
品號 PART NO.	5T2553N-PT0RM01			繪圖 DRAWN	Jeff 2016/10/03	
圖號 DRAWING NO.		版本 REV.	B	核對 CHECKED	Johnny 2016/10/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/03	
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		