

ORDER INFORMATION

5 T 3 9 6 2 N - X

Pitch 3.96mm

B: Brass
P: Phosphor Bronze

X X R A 0 1

G0: Gold Flash
T0: Tin Plated



R: Tape & Reel




AMTEK 糧德

2022.11.03




Released DCC

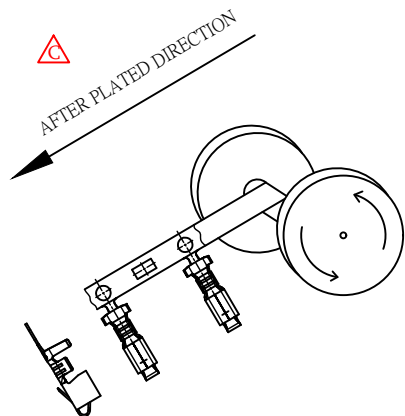

SEC:A-A



SEC:B-B

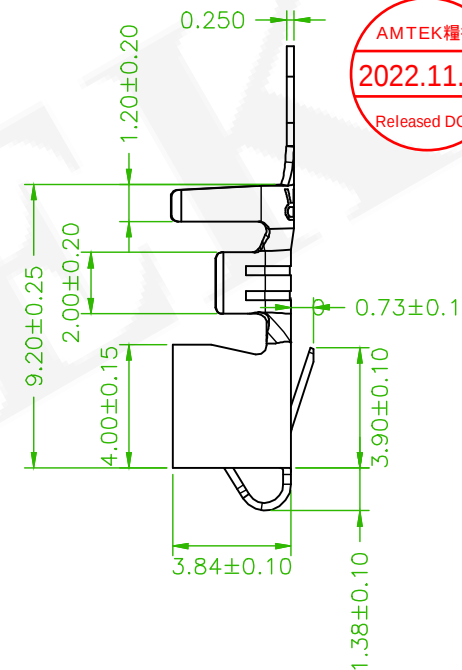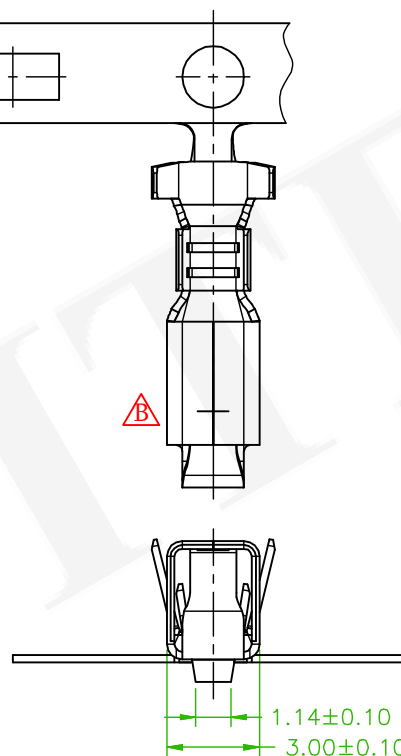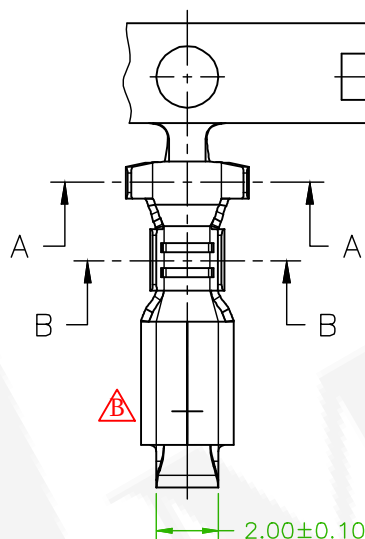

Old Part No. : 3962-T-L

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
5T3962N-BT0RA01	AWG#18-#22	3.00mm(max)	Brass	Tin Plated	4,000pcs
5T3962N-PT0RA01	AWG#18-#22	3.00mm(max)	Phosphor Bronze	Tin Plated	
5T3962N-PG0RA01	AWG#18-#22	3.00mm(max)	Phosphor Bronze	Gold Plated	
Add the after plated direction					Tim 2022/10/12
ECN 200608 :Revise the drawing					Alice 2020/07/09
REV.	ECN NO. OR DESCRIPTION				REVISED DATE


糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	3.96mm TERMINAL				頁數 Page	1/1
品號 PART NO.	5T3962N-XXXRA01				繪圖 DRAWN	Mia 2016/09/30
圖號 DRAWING NO.	GW090-AL118	版本 REV.	C	核對 CHECKED	Jonny 2016/09/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/30	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		