


1.Wire Range:AWG#18-#24
2.Insulation O.D.:3.1mm(max)

Diagram illustrating the structure of a 12-character alphanumeric code, where each character is enclosed in a box:

5 T 5 0 3 0 F - B T 0 R A 0 1

The code is segmented into five groups, each corresponding to a specific attribute:

- Pitch 5.0mm**: Derived from the first two characters (5, T).
- F:Female Type**: Derived from the next five characters (5, 0, 3, 0, F).
- B:Brass**: Derived from the next two characters (-, B).
- T0:Tin Plated**: Derived from the next two characters (T, 0).
- T:Tape&Reel**: Derived from the final four characters (R, A, 0, 1).

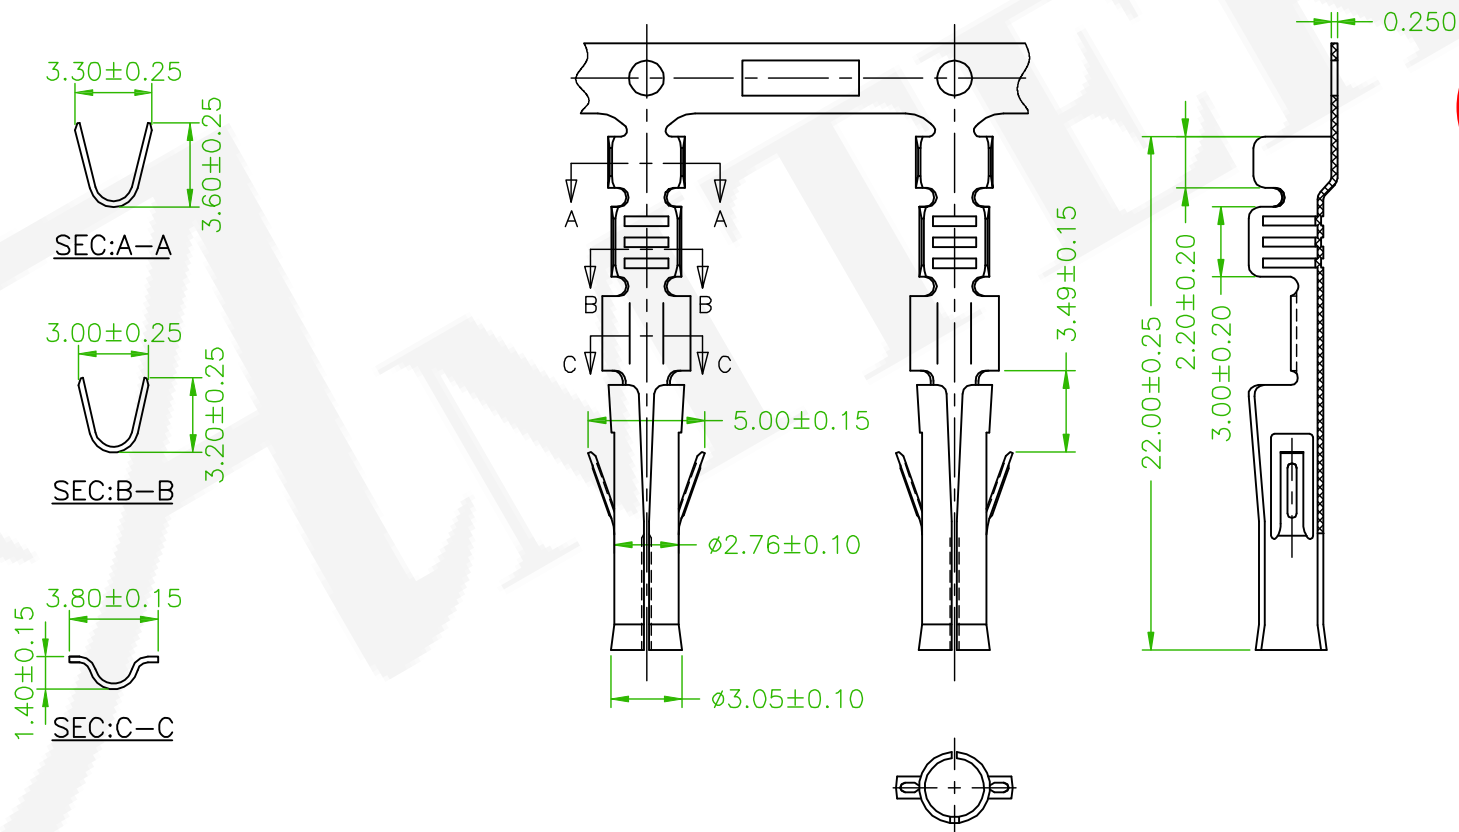

Old Part No.:5030-FT-L

				 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE		5.0mm TERMINAL			頁數 Page		1/1	
					品號 PART NO.		5T5030F-BT0RA01			繪圖 DRAWN		Roy 2016/09/20	
					圖號 DRAWING NO.				版本 REV.	A	核對 CHECKED	Jonny 2016/09/20	
					客戶品號 CUSTOMER P/N				比例 SCALE	None	承認 APPROVED	Aaron 2016/09/20	
					公差 TOLERANCE		.X ± 0.25 .XX ± 0.15	.XXX ± 0.05	單位 UNIT	mm	THIRD ANGLE PROJECTION		
REV.					ECN NO. OR DESCRIPTION				REVISED		DATE		