

Specifications



Current Rating: 13 A

Thickness: 0.3 mm




Voltage Rating: 600V

Temperature Range: -55°C ~ +105°C

ORDER INFORMATION

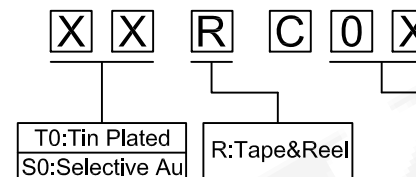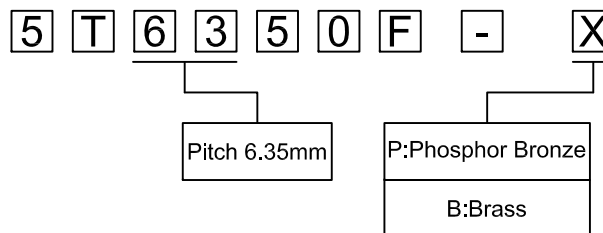

01: AWG#16-#20
02: AWG#18-#22
03: AWG#12-#14

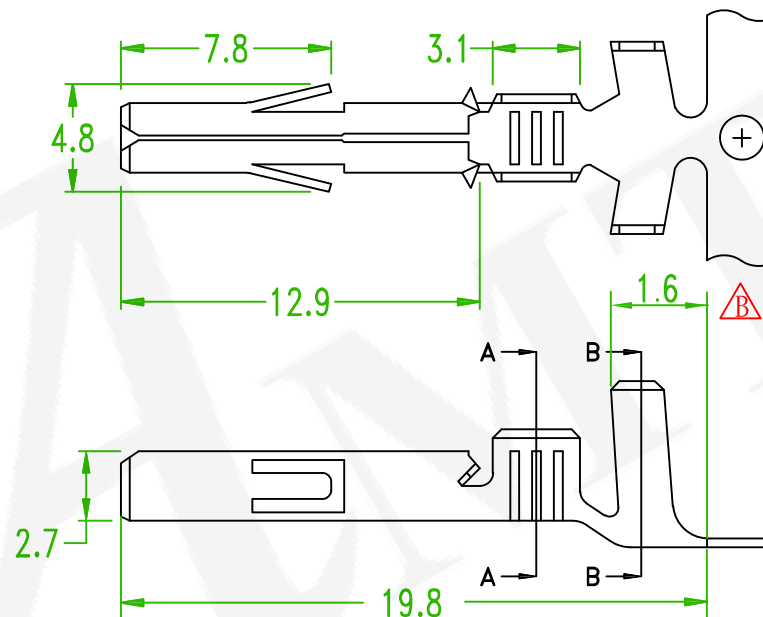

Ordering & Dimensional Information (mm)


Part No.	Dimension				Wire range	Material	Thickness	Finished
	a	b	c	d				
5T6350F-BTORC02	2.4	2.4	3.4	3.4	#18 ~ #22	Brass	0.3mm	Tin-plated
5T6350F-BTORC01	2.9	3.5	4.5±0.4	4.5±0.4	#16 ~ #20			
5T6350F-PSORC02	2.4	2.4	3.4	3.4	#18 ~ #22	Phosphor bronze	0.3mm	Contact area: Gold-flash Other: Tin-plated
5T6350F-PSORC01	2.9	3.5	4.5±0.4	4.5±0.4	#16 ~ #20			

Old Part No.:6350-FT-L

REV.	Revised the Dim:1.9->1.6	B	2017/03/20 Jeff
	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		6.35mm TERMINAL		頁數 Page	1/2
品號 PART NO.		5T6350F-XXXRC0X		繪圖 DRAWN	Jeff 2016/11/28
圖號 DRAWING NO.		GW083-JF052		核對 CHECKED	Johnny 2016/11/28
客戶品號 CUSTOMER P/N				承認 APPROVED	Aaron 2016/11/28
公差 TOLERANCE		.X ±0.25 .XX ±0.15		單位 UNIT	mm
				比例 SCALE	None
				版本 REV.	B
				THIRD ANGLE PROJECTION	☉ ↗

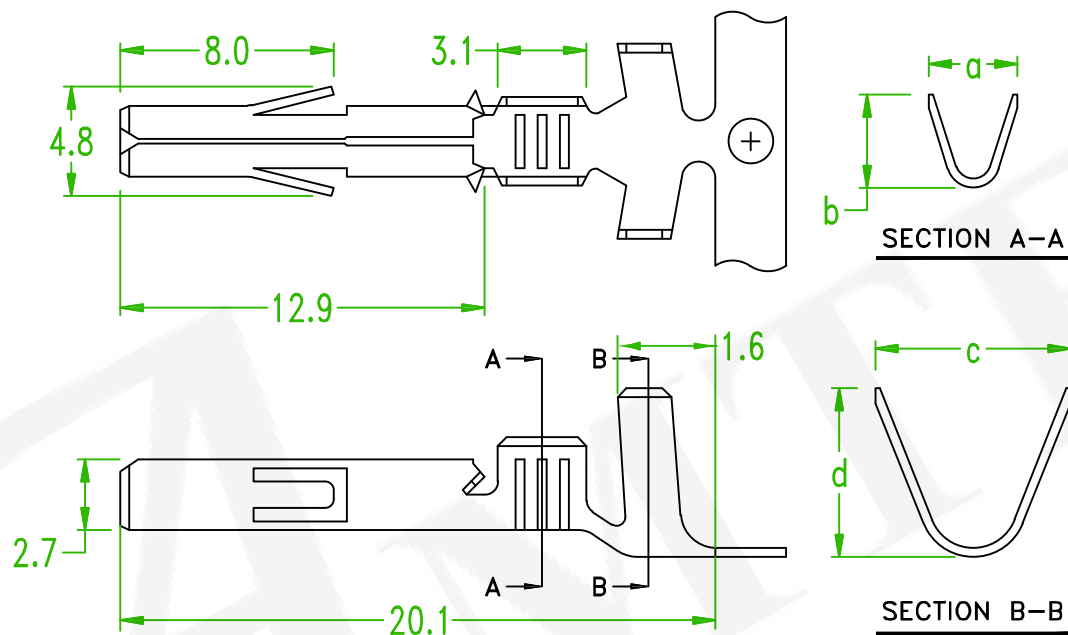

Ordering & Dimensional Information (mm)

Part No.	Dimension				Wire range	Material	Thickness	Finished
	a	b	c	d				
5T6350F-BTORC03	3.3	4.2	6.8±0.4	5.7±0.4	#12 ~ #14	Brass	0.3mm	Tin-plated
5T6350F-PSORC03	3.3	4.2	6.8±0.4	5.7±0.4	#12 ~ #14	Phosphor bronze		Contact area: Gold-flash Other: Tin-plated

Old Part No.:6350-FT-L

REV.	Revised the Dim:1.9->1.6	B	2017/03/20 Jeff
	ECN NO. OR DESCRIPTION	REVISED	DATE

Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	6.35mm TERMINAL				頁數 Page	2/2
	品號 PART NO.	5T6350F-XXXRC0X				繪圖 DRAWN	Jeff 2016/11/28
	圖號 DRAWING NO.	GW083-JF052		版本 REV.	B	核對 CHECKED	Johnny 2016/11/28
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/11/28
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15		單位 UNIT	mm	THIRD ANGLE PROJECTION	