

Electrical

Rated Voltage: 36V

Rated Current: 30A

Insulation Resistance: 500MΩ / DC 500V

Wire Range: 22-14AWG 1.5mm²

Dielectric Voltage: AC 1500V for one minute

Mechanical

Temp. Range: -40°C ~ +105°C

Torque: 0.5Nm

Material

Housing: Nylon 66, UL94V-0


Screws: M3.0, Steel, Gold Plated

Pin Header: Brass, Gold Plated


Nut: M3.0, Steel, Ni Plated

ORDER INFORMATION

5	T	B	0	8	8	R	-	E	M	4	N	X	X	B	L	X	-	W	1
Series No.								No. of Poles (03~04P)			B:Black		B:Bag A:Tray						

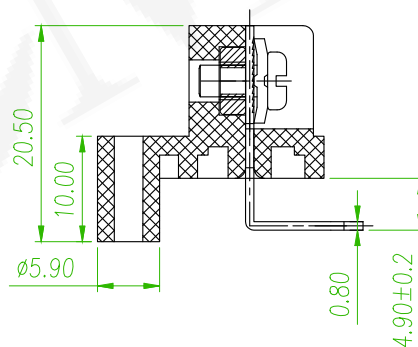

SECTION:A-A

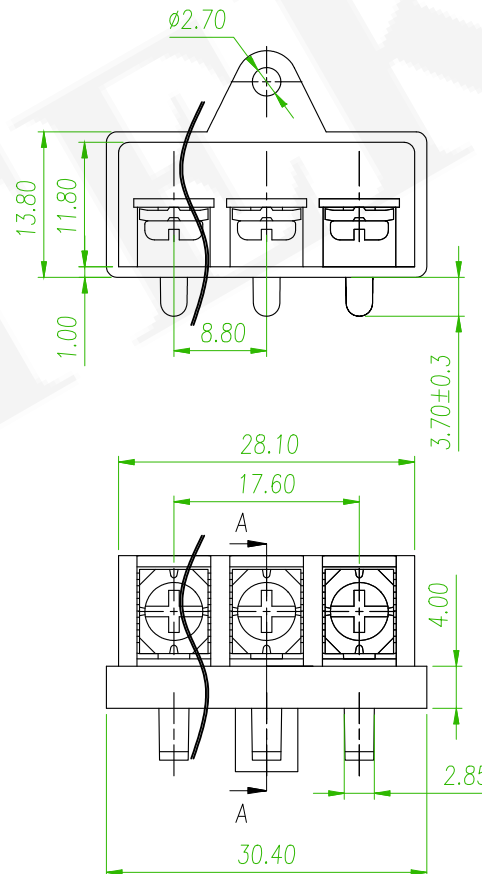

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A2	ECN NO:201211 Revise the PART NO.	Alice	2020/12/31
A1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/06



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	8.8mm Terminal Block				頁數 Page	1/1
品號 PART NO.	△ 5TB088R-EM4NXXBLX-W1				繪圖 DRAWN	Roy 2018/12/27
圖號 DRAWING NO.	GN011-R1079	版本 REV.	C	核對 CHECKED	Josh 2018/12/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/27	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		