

ELECTRICAL

Standard: UL
Rated Voltage: 300V
Rated Current: 25A
Insulation Resistance: 500MΩ / DC 500V
Wire Range: 22~12AWG 4mm²
Withstanding Voltage: AC 2000V for one min

MECHANICAL

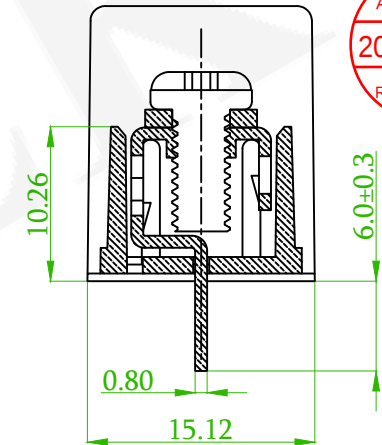
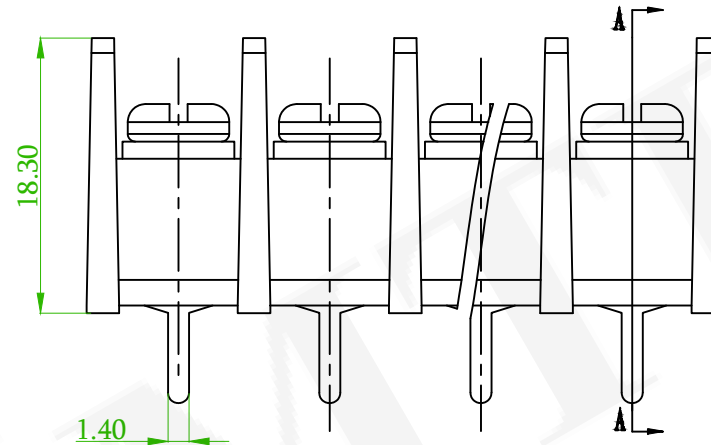
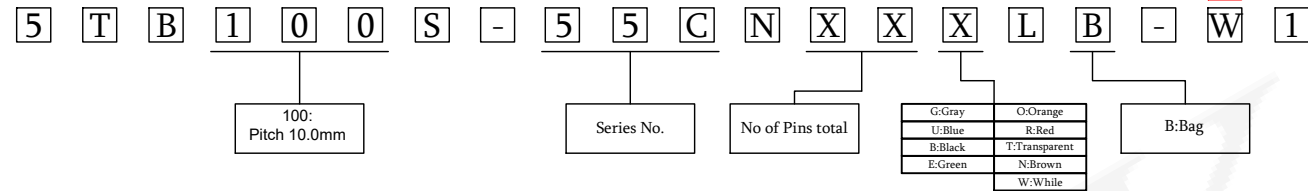
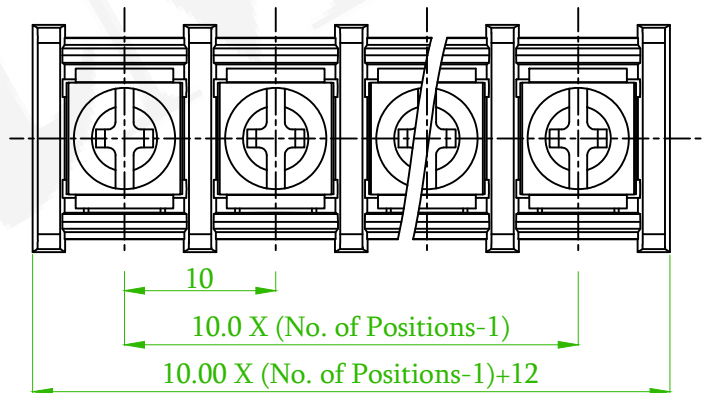
Max Tale:12.24Kgf.cm
Temp. Range: -40°C ~ +105°C

DIMENSIONS

Pitch: 10.0mm
Poles:2P~24P


MATERIAL

Housing: Nylon66, UL94V-0
Screws: M4 Steel,Ni Plated
Pin Header: Brass,0.8T,Snce plated

ORDER INFORMATION**SECTION A-A**

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∇	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△x2	ECN NO:201211 Revise the PART NO.	Alice	2020/12/31
△x1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/06
△Bx1	ECN 200102: Remove the IEC	David	2020/03/21
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	Terminal Block					頁數 Page	1/1
品號 PART NO.	⚠5TB100S-55CNXXXLB-W1			繪圖 DRAWN	Joe 2010/01/26		
圖號 DRAWING NO.	GN011-MC469	版本 REV.	D	核對 CHECKED	Paul 2010/01/26		
客戶品號 CUSTOMER P/N		比例 SCALE	2 : 1	承認 APPROVED	James 2010/01/26		
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15		單位 UNIT	mm	THIRD ANGLE PROJECTION		

Old Part No. : TB55C-B-XXP-1X-00A-L