

ElectricalStandard:  UL

Rated Voltage: 150V

Rated Current: 30A

Contact Resistance: 20mΩ

Insulation Resistance: 500MΩ / DC 500V

Wire Range: 22-10AWG 4.0mm²

Dielectric Voltage: AC 2000V for one minute

Mechanical

Temp. Range: -40°C ~ +105°C

Material

Housing: Nylon 66, UL94V-0

Screws: M4.0, Steel, Gold Plated

Pin Header: Brass, Gold Plated


ORDER INFORMATION

5 T B 1 1 0 R - 2 1 A E X X X L X - 0 1


Series No.

No of Pins total
(06~08P)


B:Black

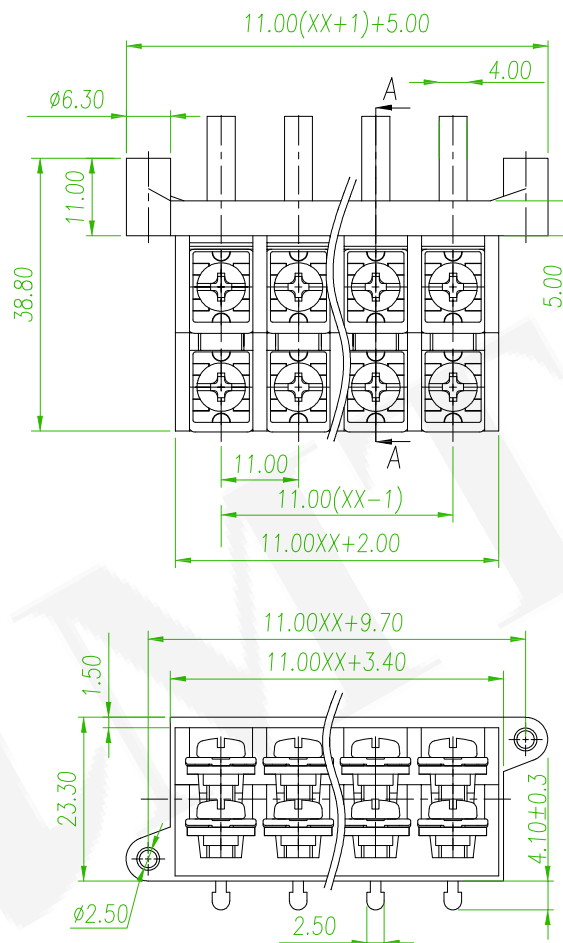B:Bag
A:Tray

SECTION:A-A

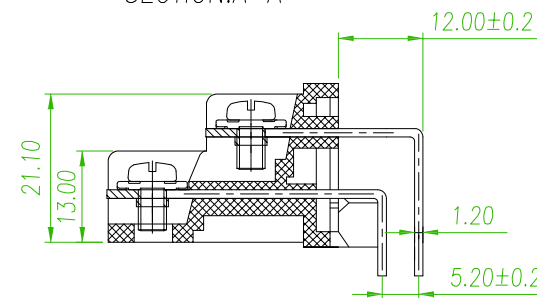


linear dimension(Tolerances Standard GB/T 14486-2008)



<i>variable range</i>	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 1000	to 10	over 10 to 100	over 100 to 1000
<i>tolerance</i>	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO:230714 Revise the PART NO.	Randy	2023/09/23
	ECN NO:220814 Revise the PART NO.	Tim	2022/09/16
	ECN NO:201211 Revise the PART NO.	Alice	2020/12/31
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	11.0mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TB110R-21AEXXXLX-01				繪圖 DRAWN	Roy 2018/12/25
圖號 DRAWING NO.	GN011-R1064	版本 REV.	F	核對 CHECKED	Josh 2018/12/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/25	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		