


Electrical 
Standard: UL
Rated Voltage: 300V
Rated Current: 20A
Contact Resistance:20mΩ
Insulation Resistance: 500MΩ / DC 500V
Wire Range: 22-12AWG 2.5mm²
Dielectric Voltage: AC 2000V for one minute

Mechanical
Temp. Range: -40°C ~ +105°C
Torque:1.2Nm

Material
Housing: Nylon 66, UL94V-0
Screws: M4.0, Steel, Gold Plated
Pin Header: Brass, Gold Plated


ORDER INFORMATION

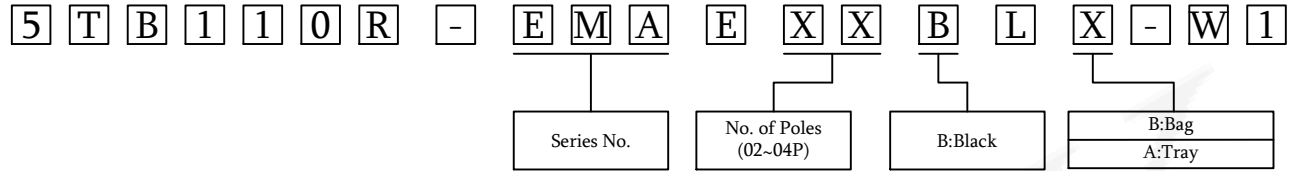

AMTEK 糧德

2021.01.13

Released DCC

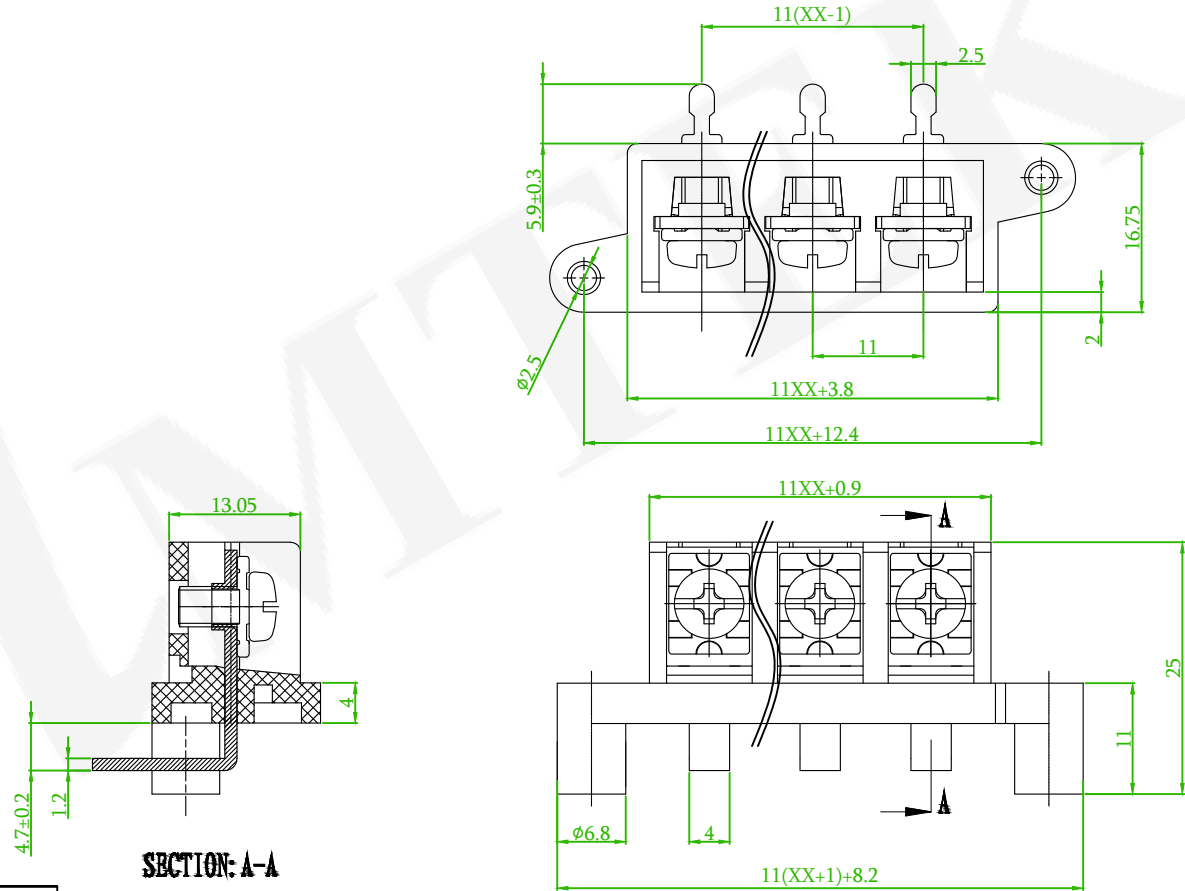

SECTION: A-A

linear dimension(Tolerances Standard GB/T 14486-2008)										—	∇	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 10			
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		
△x2	ECN NO:201211 Revise the PART NO.										Alice	2020/12/31
△x1	ECN NO:200718 Revise the Tolerance										Alice	2020/11/09
△x1	ECN 200102: Remove the IEC										David	2020/03/30
REV.	ECN NO. OR DESCRIPTION										REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	11.0mm Terminal Block				頁數 Page	1/1
品號 PART NO.	△5TB110R-EMAEXXBLX-W1				繪圖 DRAWN	Roy 2018/12/27
圖號 DRAWING NO.	GN011-R1075	版本 REV.	D	核對 CHECKED	Josh 2018/12/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/27	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		