

Electrical



Standard: UL

Rated Voltage: 300V

Rated Current: 20A

Contact Resistance: 20mΩ

Insulation Resistance: 500MΩ / DC 500V

Wire Range: 22-12AWG 2.5mm²

Dielectric Voltage: AC 2000V for one minute

Mechanical

Temp. Range: -40°C ~ +105°C

Torque: 1.2Nm





Material

Housing: Nylon 66, UL94V-0

Screws: M4.0, Steel, Gold Plated

Pin Header: Brass, Gold Plated

ORDER INFORMATION

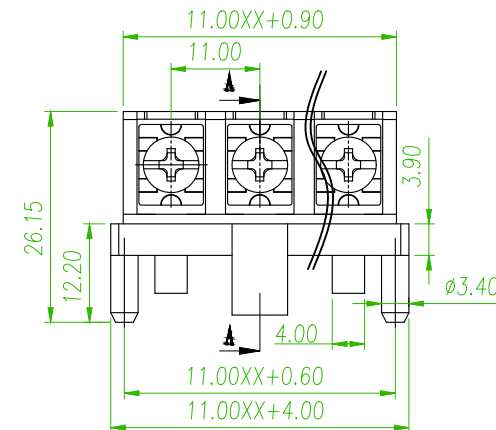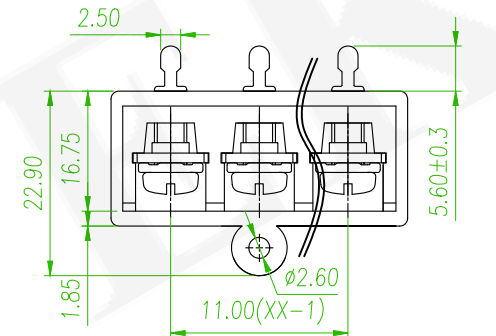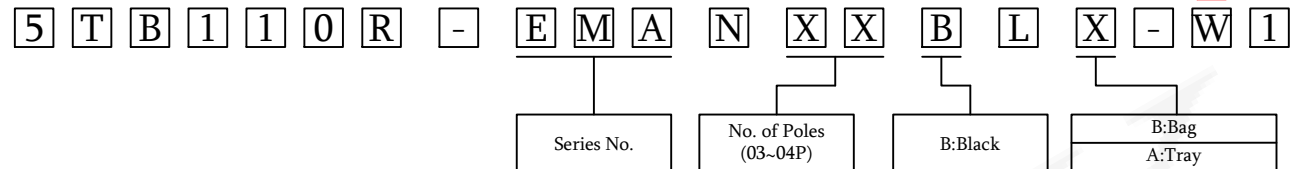

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 500	over 500 to 1000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

△x2	ECN NO:201211 Revise the PART NO.	Alice	2020/12/31
△x1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/09
△x1	ECN 200102: Remove the IEC	David	2020/03/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	11.0mm Terminal Block				頁數 Page	1/1
品號 PART NO.	△5TB110R-EMANXXBLX-W1				繪圖 DRAWN	Roy 2018/12/27
圖號 DRAWING NO.	GN011-R1077	版本 REV.	D	核對 CHECKED	Josh 2018/12/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/27	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		