

Electrical



Standard: UL

Rated Voltage: 150V

Rated Current: 20A

Contact Resistance: 20mΩ

Insulation Resistance: 500MΩ / DC 500V

Wire Range: 22-12AWG 2.5mm²

Dielectric Voltage: AC 2000V for one minute

Mechanical

Torque: 1.2Nm

Temp. Range: -40°C ~ +105°C

Max. Soldering: +250°C for 5S

Material


Housing: Nylon 66, UL94V-0

Screws: M4.0, Steel, Gold Plated

Pin Header: Brass, Gold Plated

ORDER INFORMATION

5	T	B	1	1	0	R	-	E	M	H	E	X	X	B	L	X	-	W	1
Series No.								No. of Poles (03~04P)				B:Black				B:Bag A:Tray			

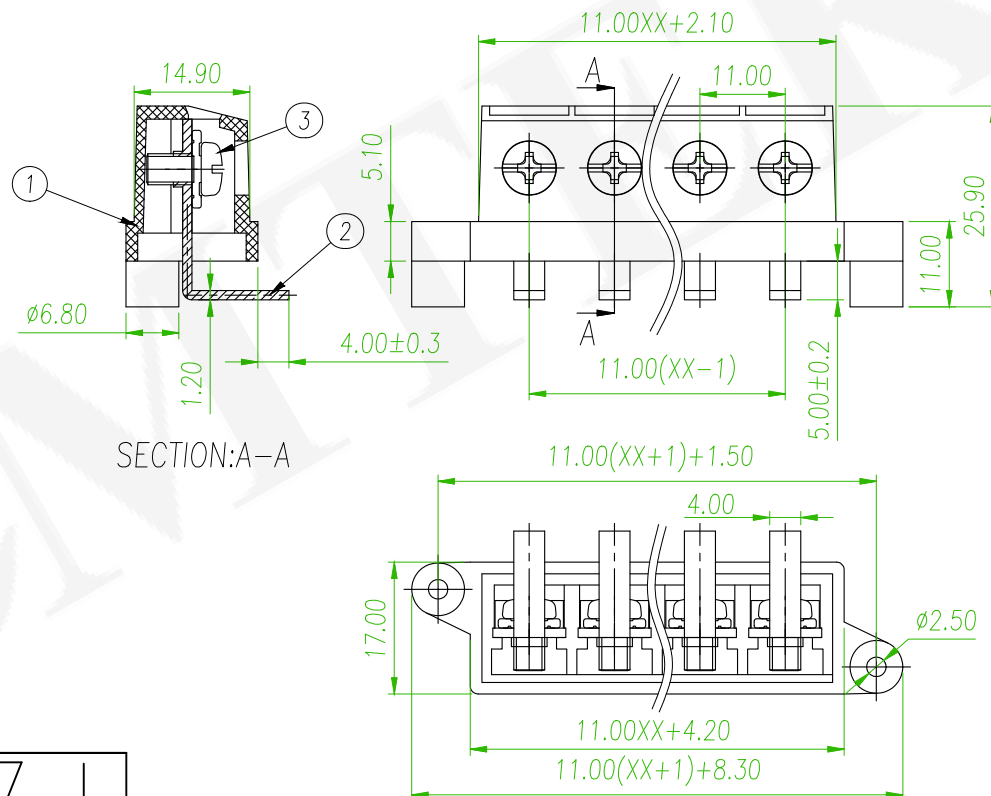

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

Δx2	ECN NO:201211 Revise the PART NO.							Alice	2020/12/31	
Δx1	ECN NO:200718 Revise the Tolerance							Alice	2020/11/09	
Δx1	ECN 200102: Remove the IEC							David	2020/03/30	
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	11.0mm Terminal Block				頁數 Page	1/1
品號 PART NO.	Δ 5TB110R-EMHEXXBLX-W1				繪圖 DRAWN	Roy 2018/12/25
圖號 DRAWING NO.	GN011-R1066	版本 REV.	D	核對 CHECKED	Josh 2018/12/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/25	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		