
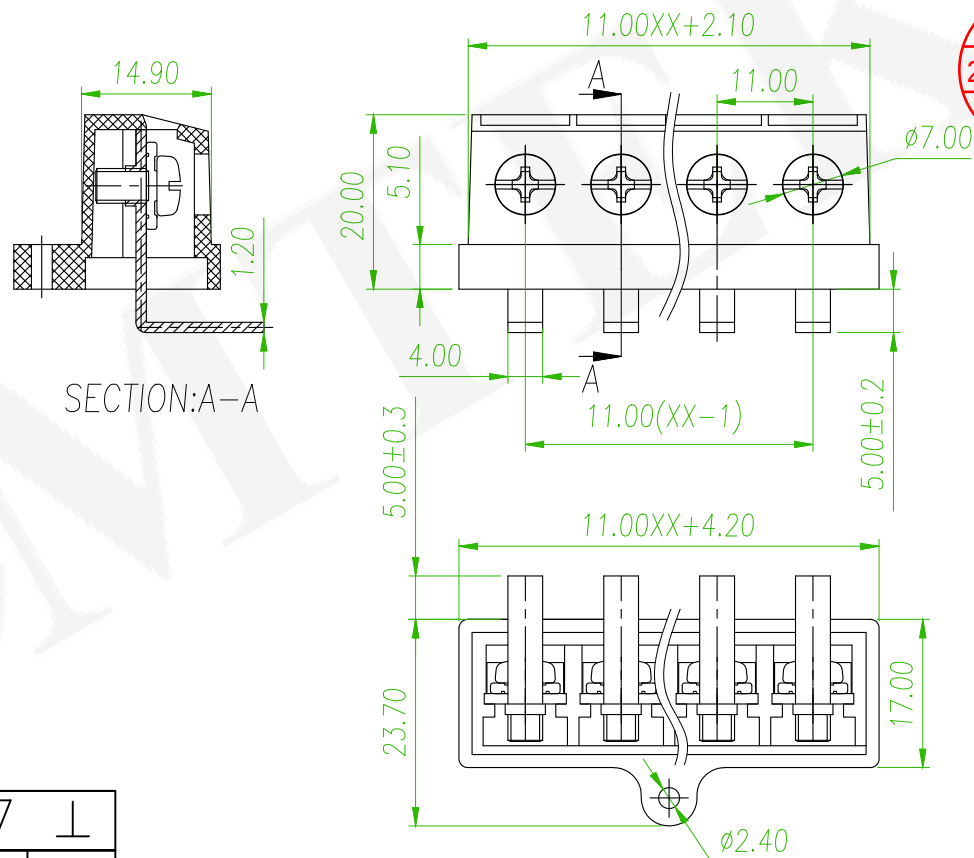


Electrical 
Standard: UL
Rated Voltage: 150V
Rated Current: 20A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Wire Range: 22-12AWG 2.5mm²
Dielectric Voltage: AC 2000V for one minute

Mechanical
Torque: 1.2Nm
Max. Soldering: +250°C for 5S
Temp. Range: -40°C ~ +105°C
Material
Housing: Nylon 66, UL94V-0
Screws: M4.0, Steel, Gold Plated
Pin Header: Brass, Gold Plated

ORDER INFORMATION

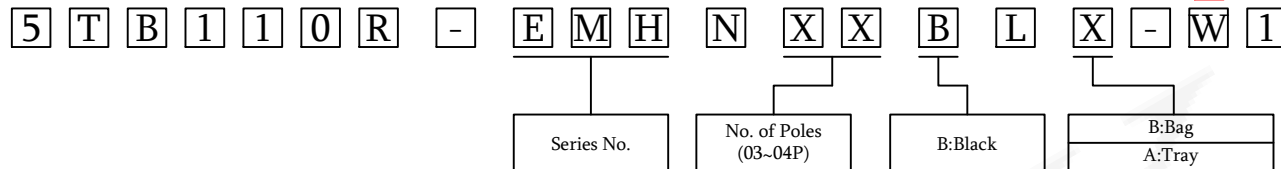

AMTEK 耀德
2021.01.13
Released DCC

linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

 x2	ECN NO:201211 Revise the PART NO.	Alice	2020/12/31
 x1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/09
 x1	ECN 200102: Remove the IEC	David	2020/03/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	11.0mm Terminal Block				頁數 Page	1/1
品號 PART NO.	 5TB110R-EMHNXXBLX-W1				繪圖 DRAWN	Roy 2018/12/25
圖號 DRAWING NO.	GN011-R1065	版本 REV.	D	核對 CHECKED	Josh 2018/12/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/25	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		