

RATED VOLTAGE: 300V
RATED CURRENT: 20A
CONTACT RESISTANCE: 20mΩ
INSULATION RESISTANCE: 500MΩ / DC 500V
WIRE RANGE: 22-12AWG
DIELECTRIC VOLTAGE: AC 1600V FOR ONE MINUTE
USING TEMPERATURE RANGE: -40°C ~ +105°C
SOLDERING TEMPERATURE: 260°C/5S

5 T B 1 1 0 S - 6 5 S E X X X L X - 0 1

110:
PITCH11.0mm


SERIES NO.

NO OF PINS TOTAL
(2~24P)




B:BLACK

X:BOX

HOUSING: NYLON 66, UL94V-0
SCREW:STEEL M4/NI PLATED,TORQUE:1.2N-m
PIN:COPPER ALLOY,SN PLATED

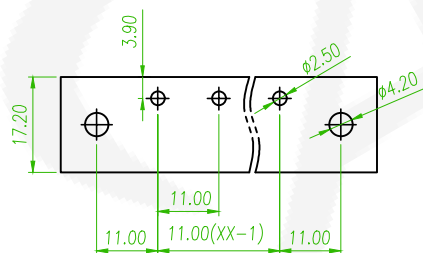

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

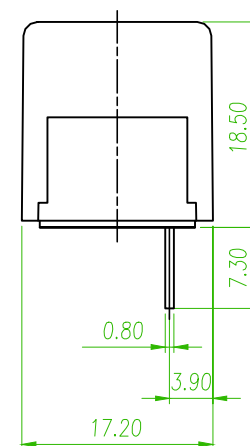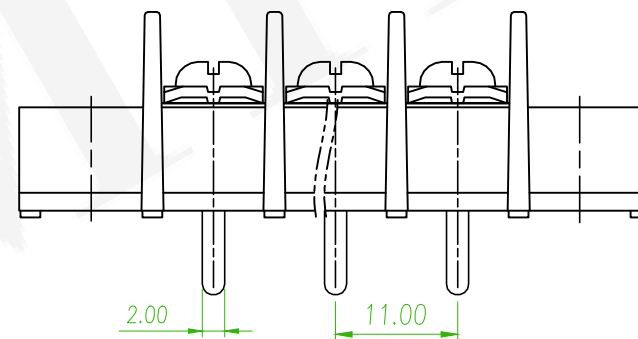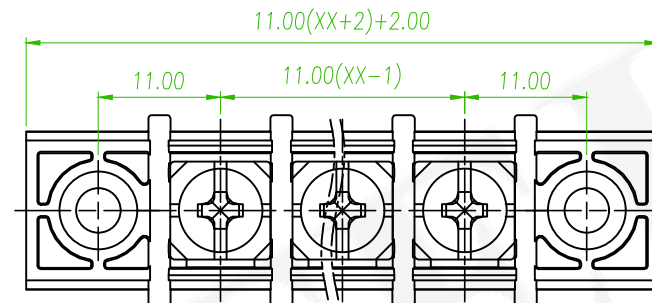

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	TERMINAL BLOCK BARRIER 11.0mm DIP V/T TYPE				頁數 Page	1/1
	品號 PART NO.	5TB110S-65SEXXXLX-01			繪圖 DRAWN	Gaby 2024/08/06	
	圖號 DRAWING NO.	GN011-GY820	版本 REV.	A	核對 CHECKED	Josh 2024/08/06	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/08/06	
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		