

Electrical



Standard: UL

Rated Voltage: 300V

Rated Current: 30A

Contact Resistance:20mΩ

Insulation Resistance: 500MΩ / DC 500V

Wire Range: 22-12AWG 2.5mm²

Dielectric Voltage: AC 2000V for one minute

Mechanical

Temp. Range: -40°C ~ +105°C

Torque:1.2Nm




Material

Housing: Nylon 66, UL94V-0

Screws: M4.0, Steel, Gold Plated

Pin Header: Brass, Gold Plated

ORDER INFORMATION

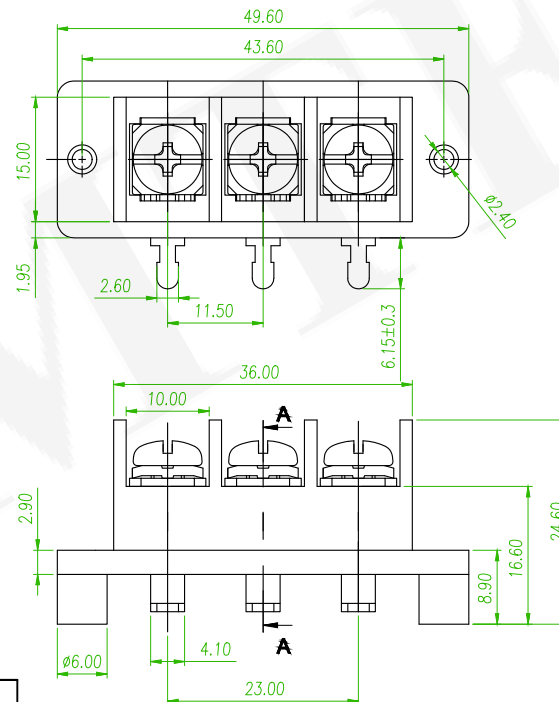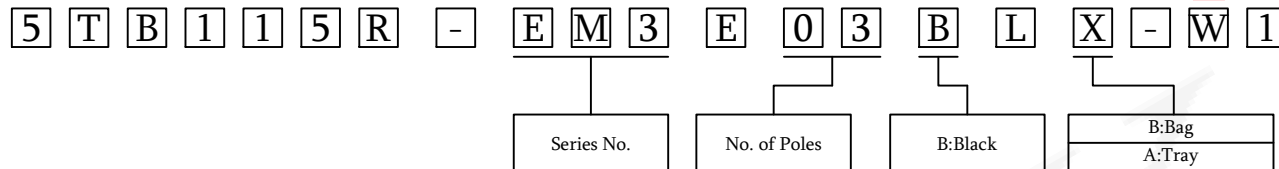

SECTION:A-A

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

Δx2	ECN NO:201211 Revise the PART NO	Alice	2021/01/04
Δx1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/11
Δx1	ECN 200102: Remove the IEC	David	2020/05/11
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	11.5mm Terminal Block				頁數 Page	1/1
品號 PART NO.	Δ 5TB115R-EM3E03BLX-W1				繪圖 DRAWN	Roy 2018/12/27
圖號 DRAWING NO.	GN011-R1078	版本 REV.	D	核對 CHECKED	Josh 2018/12/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/27	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		