

Mechanical

Material


Pin Header: Copper Alloy, Tin Plated

Diagram illustrating the structure of the barcode (5 T B 6 3 5 R - 1 6 R N X X B L X - W 1). The barcode is divided into four main sections:



- Series No.:** 1 6 R
- No. of Poles (02~26P):** N X X
- B:Black:** B L
- B:Bag (X) A:Tray (W):** X - W 1



Released DCC.

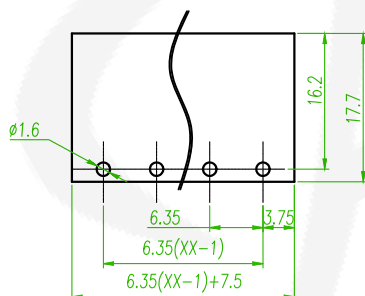

Recommended PCB Layout

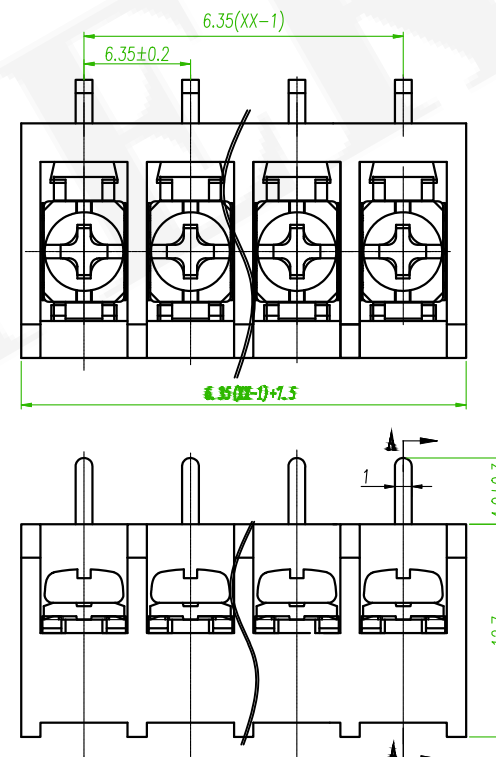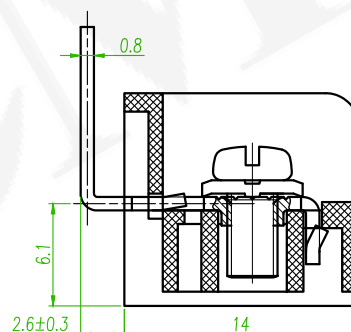

linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO:201211 Revise the PART NO	Alice	2021/01/04
	ECN NO:200718 Revise the Tolerance	Alice	2020/11/11
	ECN 200102: Remove the IEC	David	2020/06/06
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	6.35mm Terminal Block				頁數 Page	1/1
品號 PART NO.	△ 5TB635R-16RNXXBLX-W1			繪圖 DRAWN	Roy 2019/01/04	
圖號 DRAWING NO.	GN011-R1118	版本 REV.	D	核對 CHECKED	Josh 2019/01/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2019/01/04	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		