ELECTRICAL

Standard: UL
Rated Voltage: 300V
Rated Current: 10A
Contact Resistance:20mΩ
Insulation Resistance:500MΩ/DC500V
Withstanding Voltage: AC 2000V for one min
Wire range:22-16AWG 1mm²

MECHANICAL

Torque:0.5N.m
Temp. Range : -40°C ~ +105°C
Max Soldering:+250°C,for 5 Sec

MATERIAL

Housing : PA66, UL94V-0
Screws:M3,Steel,Ni Plated
Pin Header : Copper Alloy 0.8t, Tin Plated

ORDER INFORMATION

5 T B 6 3 5 S - 1 6 S N X X B L B - W 1

Series No.	No of Pins total (02~26P)	B:Black	B:Bag

certified Pb RoHS Compliant

AMTEK糧德
2021.01.13
Released DCC

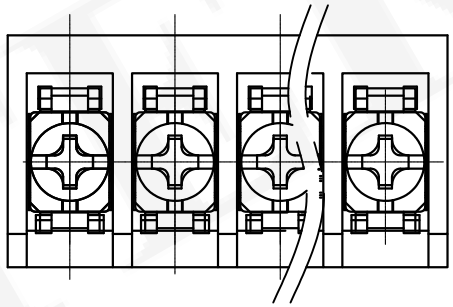

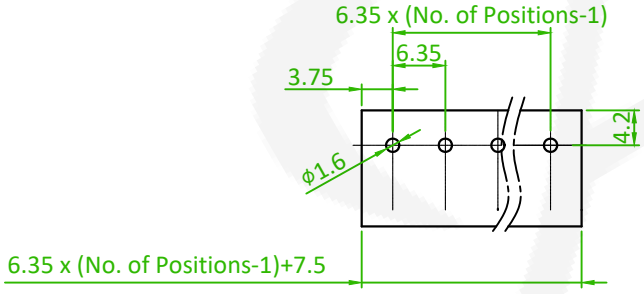

P.C.B. LAYOUT

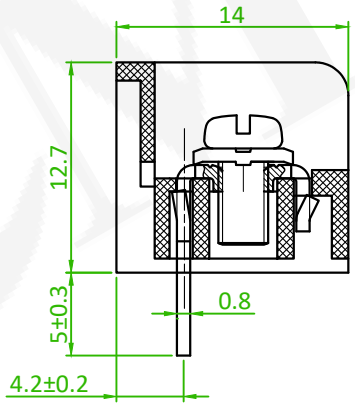

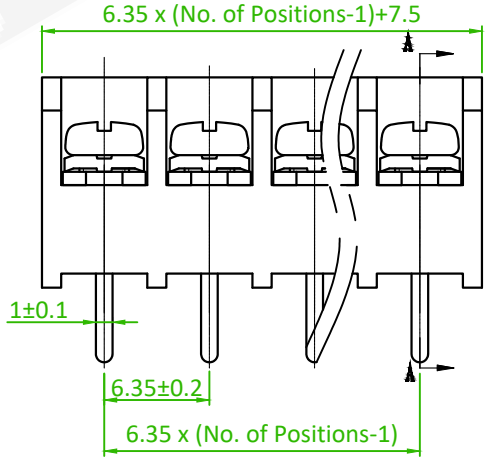

C

linear dimension(Tolerances Standard GB/T 14486-2008)								—	▱	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
D x2	ECN NO:201211 Revise the PART NO	Alice	2021/01/04
C x1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/11
B x1	ECN 200102: Remove the IEC	David	2020/06/06

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	6.35mm Terminal Block			頁數 Page	1/1
品號 PART NO.	D 5TB635S-16SNXXBLB-W1			繪圖 DRAWN	Mia 2018/04/12
圖號 DRAWING NO.	GN011-MD072	版本 REV.	D	核對 CHECKED	Josh 2018/04/12
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/04/12
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION	