

Electrical

Standard:  UL

Rated Voltage: 300V


Rated Current: 20A

Wire Range: 22-12AWG 4mm²

Withstanding Voltage: AC 2000V for one min

Insulation Resistance: 500MΩ / DC 100V

ORDER INFORMATION

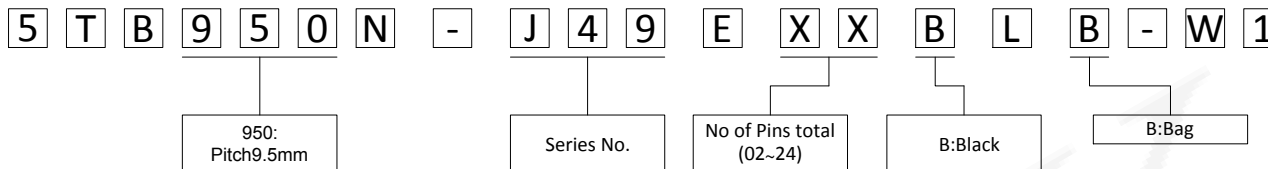

Mechanical

Torque: 0.8Nm(7.0Lb'in)

Temp. Range: -40°C ~ +105°C

Material

Housing: Nylon 66, UL94V-0


Screws: M3.5, Steel, Nickel Plated

Pin Header: Brass, Tin Plated

Dimensions

Pitch: 9.5mm

Poles: 2P-24P

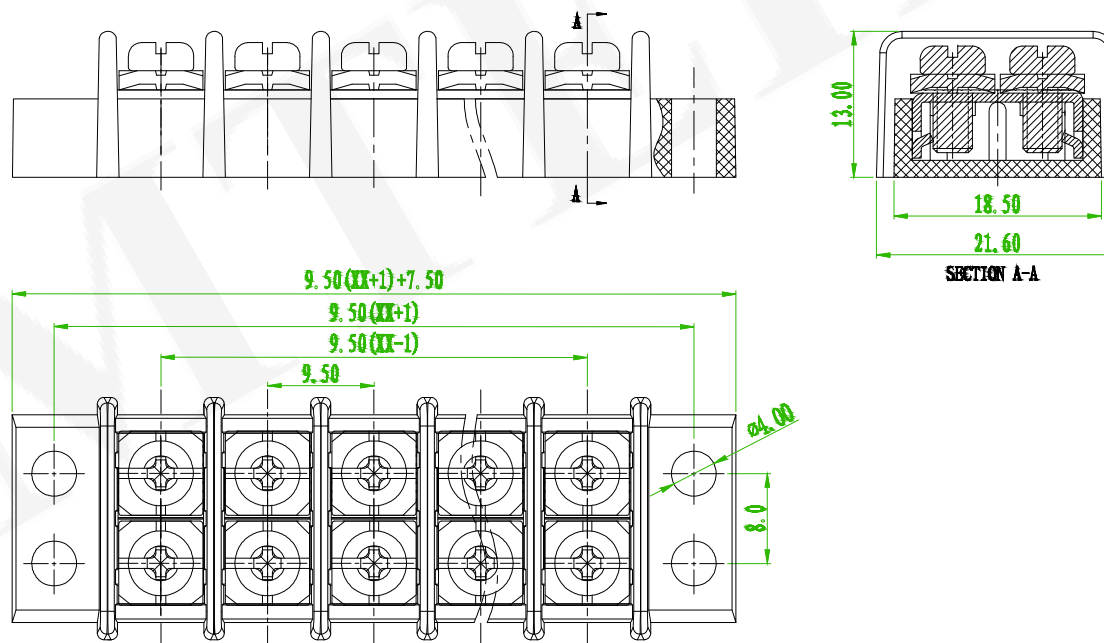

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

 3	ECN NO:200718 Revise the Tolerance & ECN NO:201211 Revise the PART NO.	Alice	2020/12/22
 1	ECN 200102: Remove the IEC	David	2020/06/06
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	 5TB950N-J49EXXBLB-W1				繪圖 DRAWN	Mia 2016/08/03
圖號 DRAWING NO.	GN011-NI732	版本 REV.	C	核對 CHECKED	Boris 2016/08/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/03	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		