

MECHANICAL

Standard: UL
Rated Voltage: 600V
Rated Current: 26A
Withstanding voltage: AC 2000V for one minute
Contact Resistance: 20MΩ
Insulation Resistance: 500MΩ/DC500V
Wire Range: 20-10AWG(UL) 1-6mm²(IEC)

MECHANICAL


Temp. Range: -40°C ~ +105°C
Torque: 0.5Nm(4.51b`in)
Strip length: 7-8mm

MATERIAL

Housing: Nylon 66, UL94V-2
Screws: M3, Steel, Zinc Plated
Current Carrier: SPCC, Zinc Plated




NOTE

Symbol " **02** " means serial as Order Information shown



須注意①
螺絲請勿超出鐵片 **02**

ORDER INFORMATION

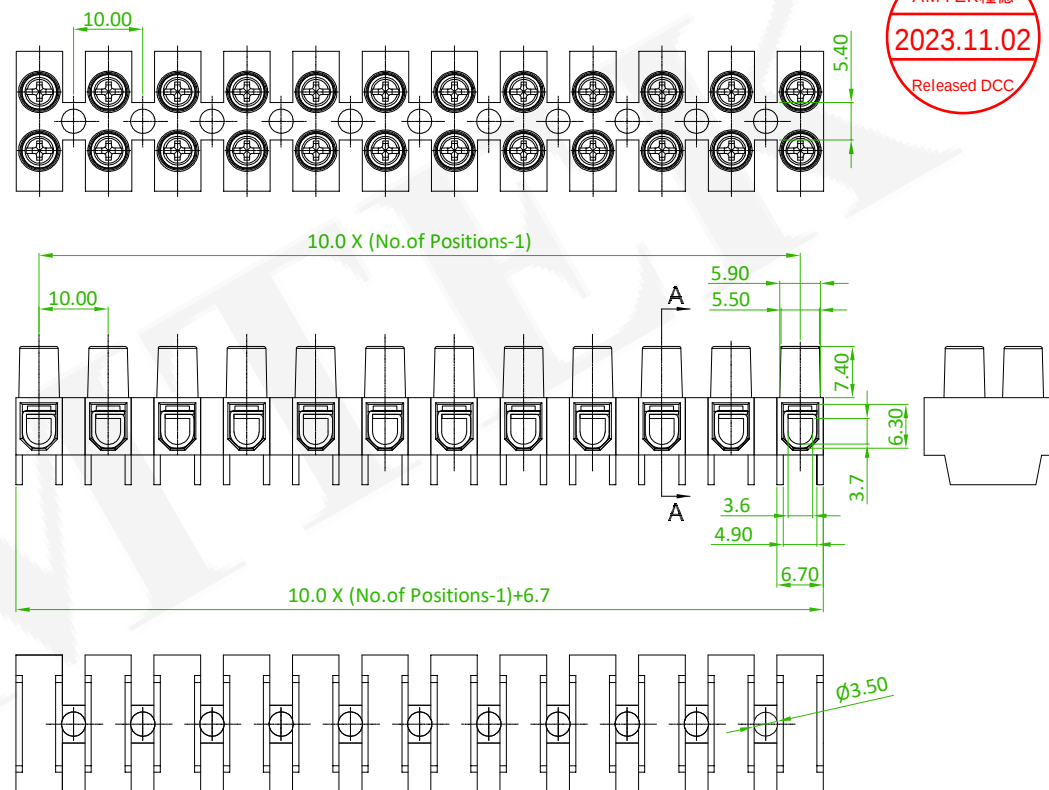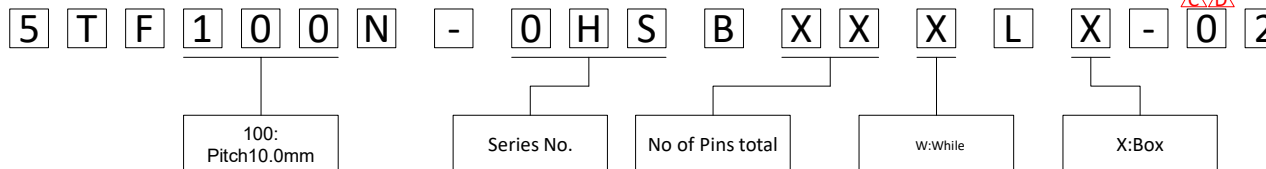

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 30	over 30 to 60
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

Old Part No. : TB10HS-4.3-12P-19-00A-S01-L

△	ECN NO:230717 Revise the PART NO.	Benson	2023/08/29
△x2	ECN NO:201210 Revise the PART NO.	Alice	2020/12/18
△x1	ECN NO:200718 Revise the Tolerance	Alice	2020/09/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	△ 5TF100N-0HSBXXXLX-02 △				繪圖 DRAWN	Mia 2017/02/13
圖號 DRAWING NO.	GN116-MC275		版本 REV.	D	核對 CHECKED	Jonny 2017/02/13
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2017/02/13
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	