


ORDER INFORMATION

Standard:	UL	IEC
Rated Voltage:	600V	750V
Rated Current:	26A	41A
Contact Resistance:	20mΩ	
Insulation Resistance:	500MΩ / DC 500V	
Withstanding Voltage:	AC 2000V for one minute	
Wire range:	20~10AWG 6mm ²	

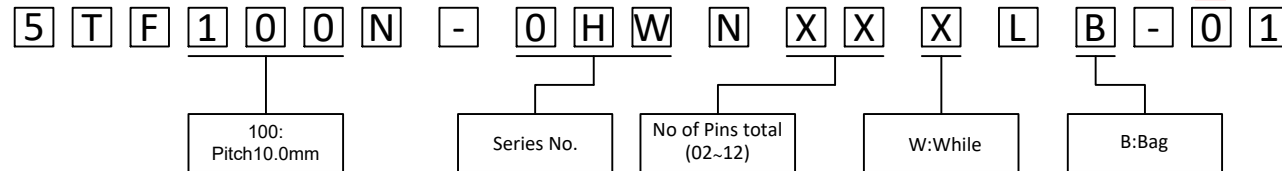

MACHANICAL




Temp.Range:-40°C~+105°C
Torque:0.5Nm(4.5Lb.in)
Steip Length:7-8mm

DIMENSIONS

Pitch: 10.0mm
Poles:2-12P

MATERIAL

Housing: PA66, UL94V-0
Screws:M3 Steel,Zn plated
Copper Cylinder:SPCC,Zn plated

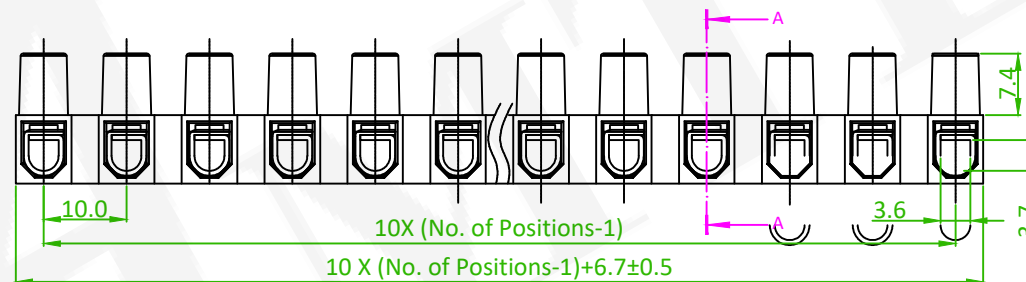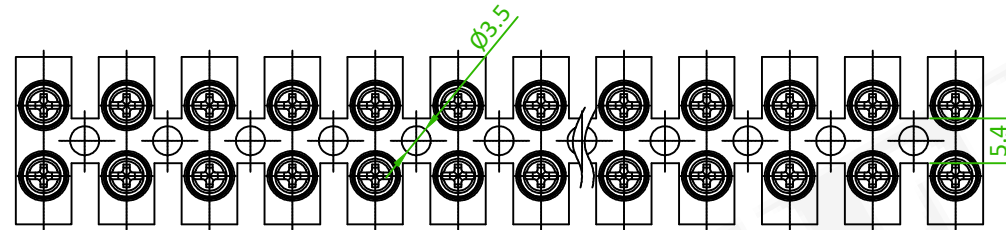

Section A-A



linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO:230714 Revise the PART NO.	Alice	2023/09/23
	ECN NO:201210 Revise the PART NO.	Alice	2020/12/18
	ECN NO:200718 Revise the Tolerance	Alice	2020/09/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	 5TF100N-0HWNXXXLB-01			繪圖 DRAWN	Mia 2017/07/28	
圖號 DRAWING NO.	GN011-MC573	版本 REV.	D	核對 CHECKED	Caro 2017/07/28	
客戶品號 CUSTOMER P/N		比例 SCALE	1:1	承認 APPROVED	Jason 2017/07/28	
公差 TOLERANCE	.X ±0.30 .XX±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		