

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 600V 750V
 Rated Current: 65A 76A
 Contact Resistance: 20mΩ
 Withstanding Voltage: AC 2000V for one min
 Insulation Resistance: 500MΩ
 Wire range: 20-6AWG 10.0mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C
 Torque: 1.2Nm
 Steip length: 7-8mm

MATERIAL




Housing: PA66, UL94V-2
 Screws: M4 Steel, Zn plated
 Copper Cylinder: Brass, Ni plated

ORDER INFORMATION

5	T	F	1	4	6	N	-	1	6	H	A	X	X	X	L	X	-	0	1
Series No.								Poles (02-12P)				G:Gray			A:Tray B:Bag				



AMTEK 耀德
 2023.11.02
 Released DCC

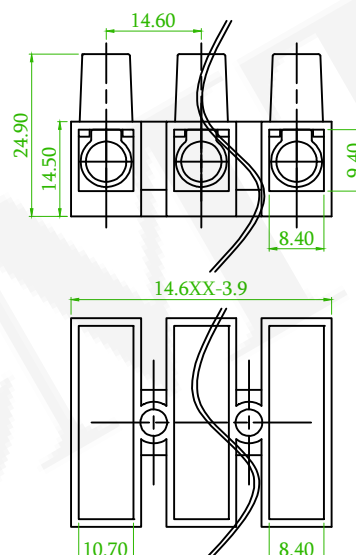

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN NO:230714 Revise the PART NO.	Alice	2023/09/23
△x2	ECN NO:201210 Revise the PART NO.	Alice	2020/12/18
△x1	ECN NO:200718 Revise the Tolerance	Alice	2020/09/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
 耀德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	14.6mm Terminal Block				頁數 Page	1/1
品號 PART NO.	△△ 5TF146N-16HAXXXLX-01				繪圖 DRAWN	Eric 2018/12/27
圖號 DRAWING NO.	GN011-EA416	版本 REV.	D	核對 CHECKED	Josh 2018/12/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/27	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		