






Electrical
Standard: UL IEC
Rated Voltage: 300V 450V
Rated Current: 15A 32A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Withstanding Voltage: AC 2000V for one min
Wire Range:20~10AWG 0.5-4.0mm²

Mechanical
Temp. Range: -40°C ~ +105°C
Steip Length:7-8mm
Torque(Max):0.4Nm(3.6Lb.in)

Dimensions
Pitch: 8.2mm
Poles:2-12P

Material
Housing: PA66, UL94V-2
Screws:M2.5 Steel,Zn Plated
Pressure line column:SPCC,Zn plated

ORDER INFORMATION

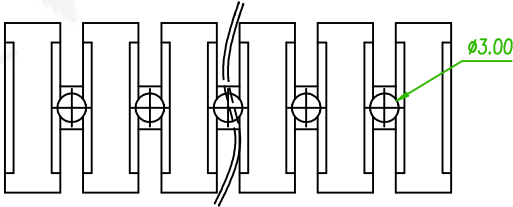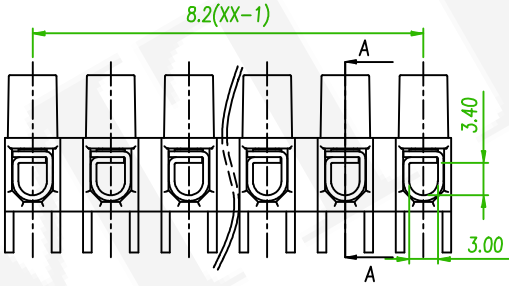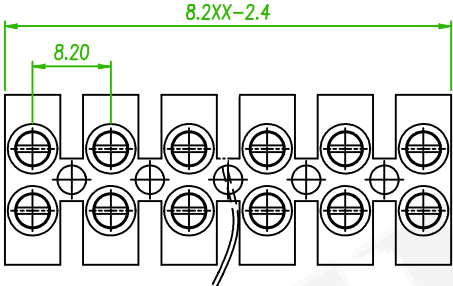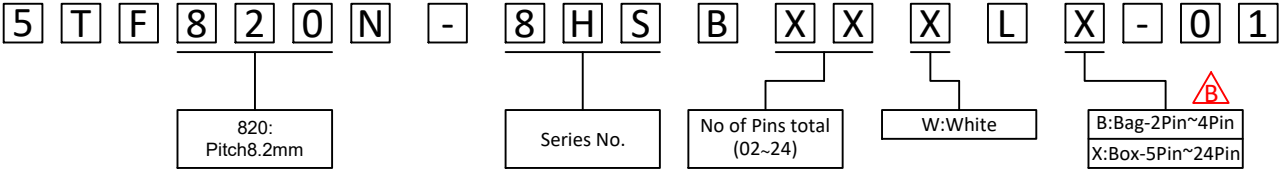

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
△	ECN NO:230714 Revise the PART NO.							Alice	2023/09/23	
△x2	ECN NO:201210 Revise the PART NO.							Alice	2020/12/18	
△x1	ECN NO:200718 Revise the Tolerance							Alice	2020/09/30	
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	

AMTEK 糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	△△ 5TF820N-8HSBXXXLX-01				繪圖 DRAWN	Mia 2016/04/19
圖號 DRAWING NO.	GN011-NI333		版本 REV.	E	核對 CHECKED	Sabrina 2016/04/19
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	John 2016/04/19
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	