

ELECTRICAL

Standard: UL IEC
Rated Voltage: 150V 160V
Rated Current: 4A 6A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Wire range: 28~20AWG 0.5mm²
Withstanding Voltage: AC 2000V for one minute

MECHANICAL






Strip Length: 5-6mm
Temp. Range: -40°C~+105°C

MATERIAL

Housing: PA66, UL94V-0
Wire guard: Stainless Steel
Clamp: Copper alloy, Sn plated

ORDER INFORMATION

5 T M 2 5 0 N - W 0 1 N X X G L X - 0 1

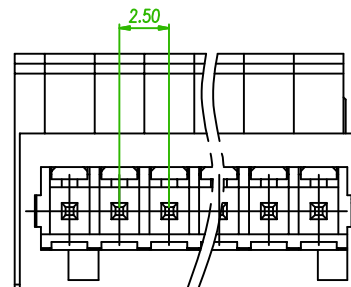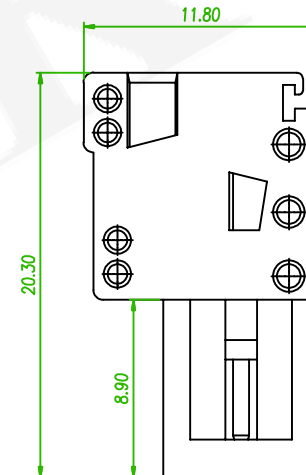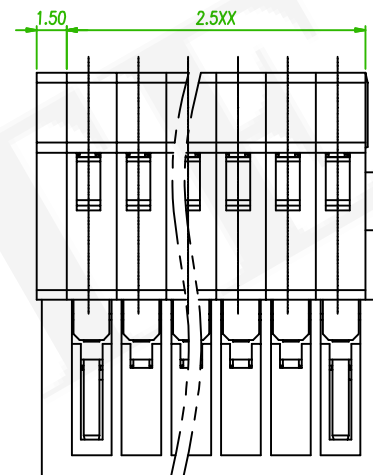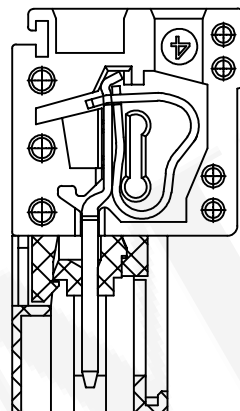

linear dimension (Tolerances Standard GB/T 14486-2008)										—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
1	Revise the tolerance	David	2020/08/06


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.5mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM250N-W01NXXGLX-01				繪圖 DRAWN	Nick 2020/01/14
圖號 DRAWING NO.	GN011-NI751	版本 REV.	B	核對 CHECKED	Josh 2020/01/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/01/14	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		