

ELECTRICAL
Standard: UL IEC
Rated Voltage: 150V 160V
Rated Current: 4A 6A
Contact Resistance:20mΩ
Insulation Resistance: 500MΩ / DC 500V
Wire range:28~20AWG 0.5mm²
Withstanding Voltage: AC 2000V for one minute

MECHANICAL
Strip Length:5-6mm
Temp.Range:-40℃~+105℃

Dimensions
Pitch:2.5mm
Poles:2-12P

MATERIAL
Housing: PA66, UL94V-0
Wire guard:Stainless Steel
Clamp:Copper alloy,Sn plated


ORDER INFORMATION

5 T M 2 5 0 N - W 0 2 F X X X L X - 0 1

No of Poles
(02~12)

G:Gray

A:Tray
B:Bag

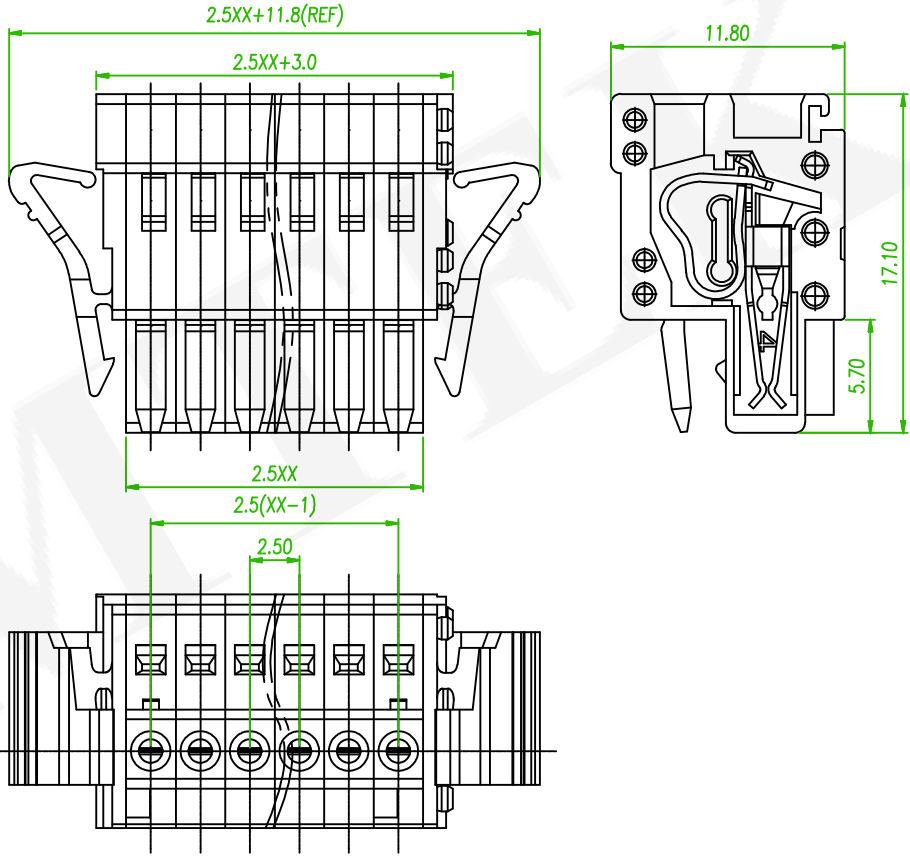

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
△	ECN NO:230714 Revise the PART NO.							Alice	2023/09/23	
△x2	ECN NO:201224 Revise the PART NO.							Alice	2021/01/13	
△x1	ECN NO:200718 Revise the Tolerance							Alice	2020/10/28	
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm Terminal Block				頁數 Page	1/1
	品號 PART NO.	△△ 5TM250N-W02FXXXXLX-01			繪圖 DRAWN	Nick 2020/01/14	
	圖號 DRAWING NO.	GN011-NI750		版本 REV.	D	核對 CHECKED	Josh 2020/01/14
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Josh 2020/01/14
	公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	