

Electrical

Standard:
Rated Voltage: 150V
Rated Current: 4A
With standing Voltage: AC 1600V for one min

Mechanical

Temp. Range: -40°C ~ +105°C

Dimensions

Pitch: 2.5mm


Poles:2-12P

Material




Housing: PA66, UL94V-0
Clamp:Copper Alloy,Tin Plated

ORDER INFORMATION

5	T	M	2	5	0	S	-	W	0	1	N	X	X	G	L	B	-	0	1
250: Pitch 2.50mm							Series No.			No of Pins total (02~12)			G:Gray			B:Bag			

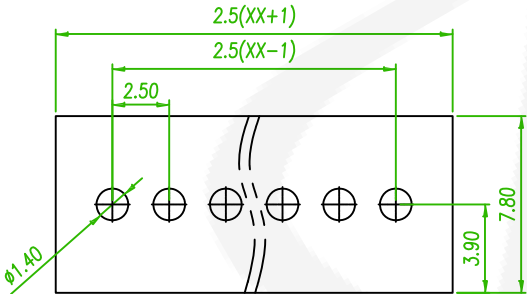

P.C.B. LAYOUT

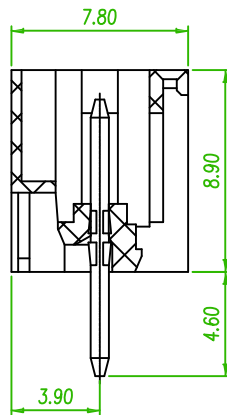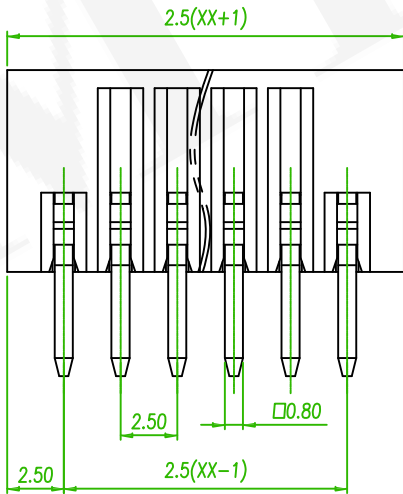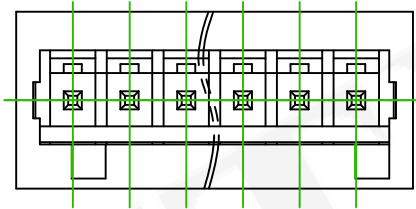

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∠	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM250S-W01NXXGLB-01				繪圖 DRAWN	Benson 2019/08/22
圖號 DRAWING NO.	GN011-BS230	版本 REV.	A	核對 CHECKED	Josh 2019/08/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/08/22	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		