

ELECTRICAL
Standard: UL IEC
Rated Voltage: 300V 130V
Rated Current: 10A 10A
Contact Resistance:20mΩ
Insulation Resistance: 500MΩ / DC 500V
Wire Rang:28~14AWG 1.5mm²
Withstanding Voltage: AC 2000V for one minute

MECHANICAL
Steip Length:8-9mm
Temp.Range:-40℃~+105℃

Dimensions
Pitch:3.5mm
Poles:2-24P

MATERIAL
Housing: PA66, UL94V-0
Wire guard:Stainless Steel
Pin header:Copper alloy,Sn plated

ORDER INFORMATION

5 T M 3 5 0 N - J 0 1 N X X G L X - 0 1


No of Poles
(02~24)

G:Gray

A:Tray
B:Bag



AMTEK 糧德
2020.11.02
Released DCC

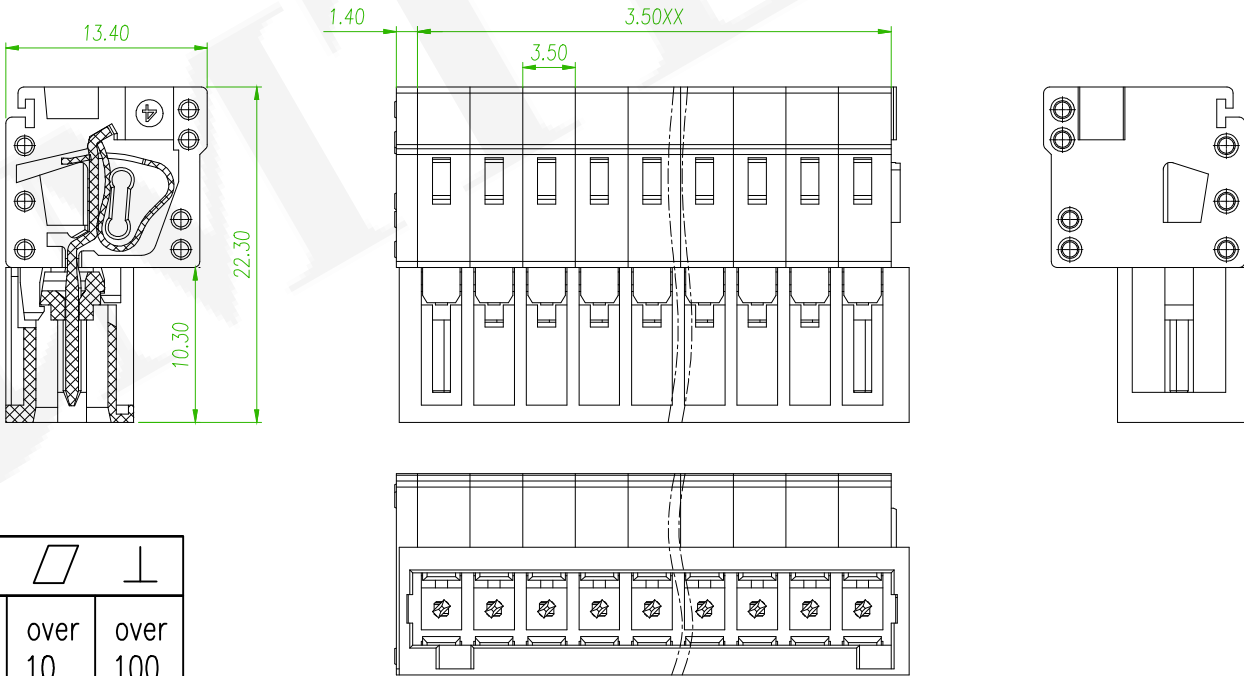

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to 160	to 10
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
ECN NO:200718 Revise the Tolerance								Alice	2020/10/28	
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	



AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	3.50mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM350N-J01NXXGLX-01				繪圖 DRAWN	Nick 2020/01/14
圖號 DRAWING NO.	GN011-NI753		版本 REV.	B	核對 CHECKED	Josh 2020/01/14
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Josh 2020/01/14
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	