

Standard:	UL	IEC
Rated Voltage:	300V	130V
Rated Current:	10A	10A
Contact Resistance:	20mΩ	
Insulation Resistance:	500MΩ / DC 500V	
Wire Rang:	28~14AWG 1.5mm ²	
Withstanding Voltage:	AC 2000V for one minute	






5 T M 3 5 0 N - J 0 2 E X X G L X - 0 1



Steip Length:8-9mm
Temp.Range:-40°C~+105°C

Pitch:3.5mm
Poles:2-24P

Housing: PA66, UL94V-0
Wire guard:Stainless Steel
Pin header:Copper alloy,Sn plated

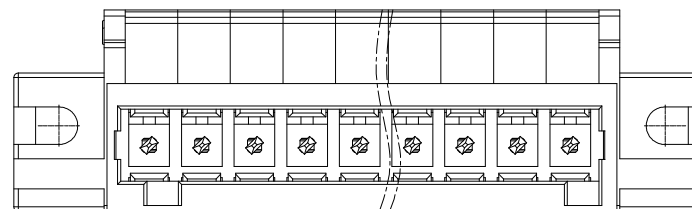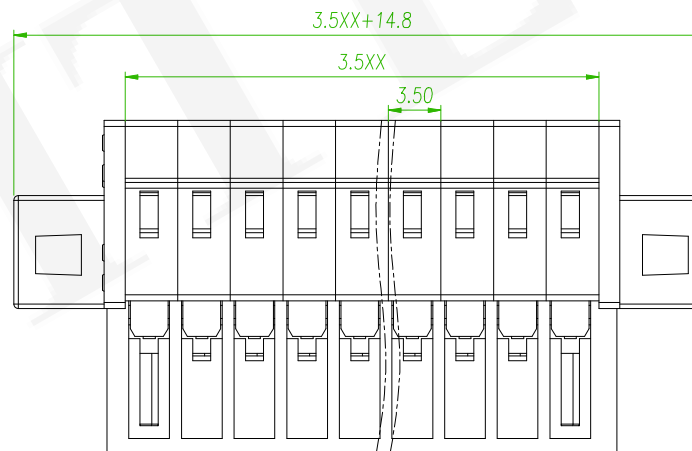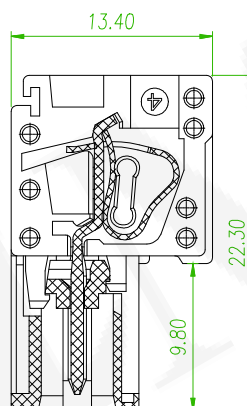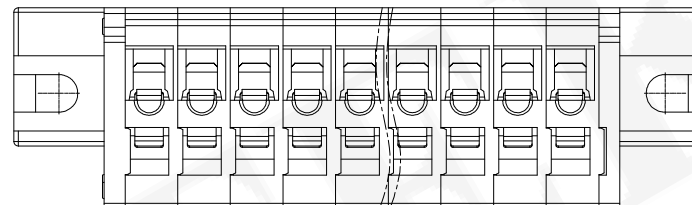

linear dimension(Tolerances Standard GB/T 14486-2008)

—	$\parallel$	$\perp$
to 10	over 10 to 100	over 100 to
0.10	0.30	0.60

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	3.50mm Terminal Block				頁數 Page	1/1
	品號 PART NO.	5TM350N-J02EXXGLX-01			繪圖 DRAWN	Nick 2020/01/14	
	圖號 DRAWING NO.	GN011-NI754	版本 REV.	B	核對 CHECKED	Josh 2020/01/14	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/01/14	
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

