
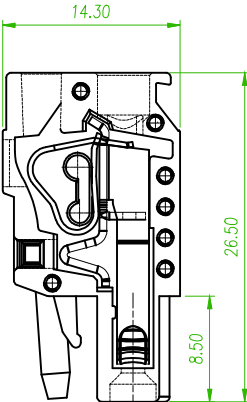
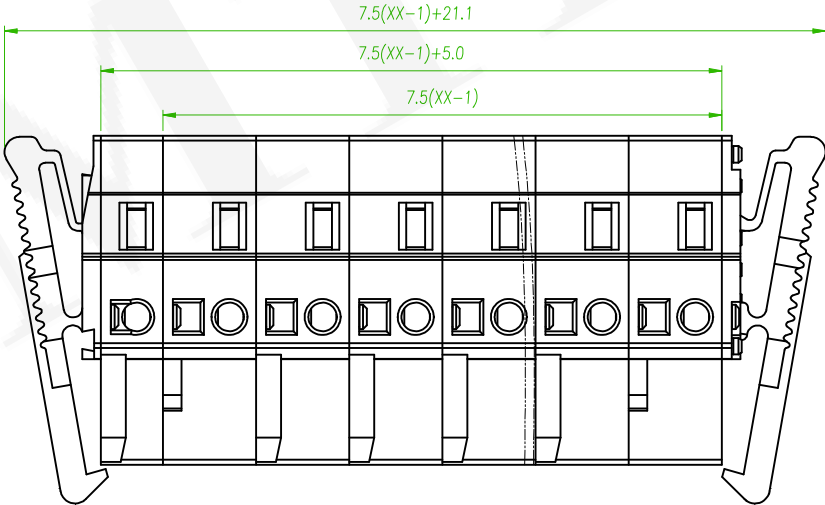
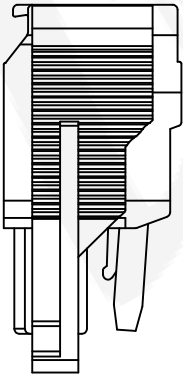
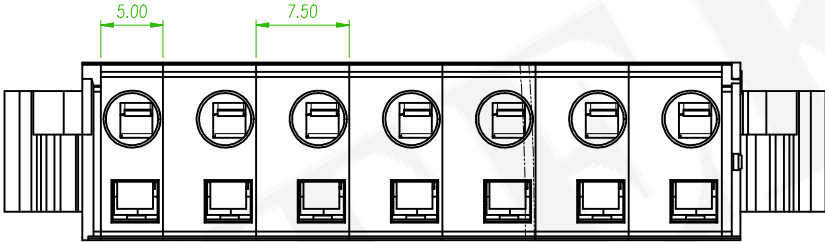


Electrical
Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 15A 16A
Contact Resistance: 20mΩ
Insulation Resistance:500MΩ/DC500V
Withstanding Voltage: AC 2000V for one minute
Wire Range:28~12AWG 2.5mm²

Mechanical
Temp. Range: -40°C ~ +105°C
Steip Length:8-9mm
Material
Housing: NY66, UL94V-0
Clamp:Phosphor Bronze,Tin Plated
Wire Guard:Stainless Steel

ORDER INFORMATION

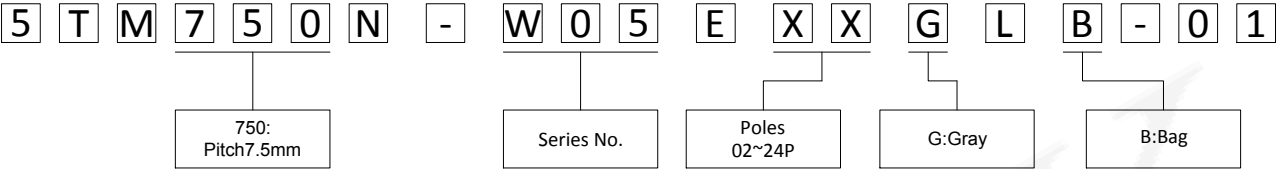

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∇	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



REV.	ECN NO:200718 Revise the Tolerance	Alice	2020/11/03
	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	7.5mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM750N-W05EXXGLB-01			繪圖 DRAWN	Mia 2018/09/19	
圖號 DRAWING NO.	GN011-MD480			版本 REV.	B	核對 CHECKED
客戶品號 CUSTOMER P/N				比例 SCALE	None	承認 APPROVED
公差 TOLERANCE				單位 UNIT	mm	THIRD ANGLE PROJECTION