

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 250V
 Rated Current: 15A 12A
 Contact Resistance: 20mΩ
 Withstanding Voltage: AC 2000V for one min
 Insulation Resistance: 500MΩ
 Wire range: 28-12AWG 2.5mm²

MECHANICAL




Temp. Range: -40°C ~ +105°C
 Steip length: 8-9mm

MATERIAL

Housing: PA66, UL94V-0
 Clamp: Phosphor bronze, Tin plated
 Wire guard: Stainless steel

ORDER INFORMATION

5	T	M	7	5	0	N	-	W	0	6	F	X	X	G	L	X	-	0	1
Series No.								Poles (02-24P)				G:Gray			A:Tray B:Bag				

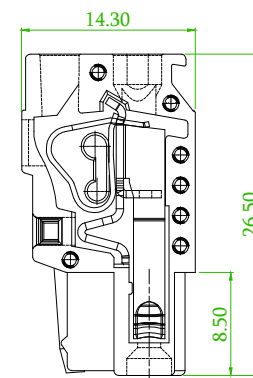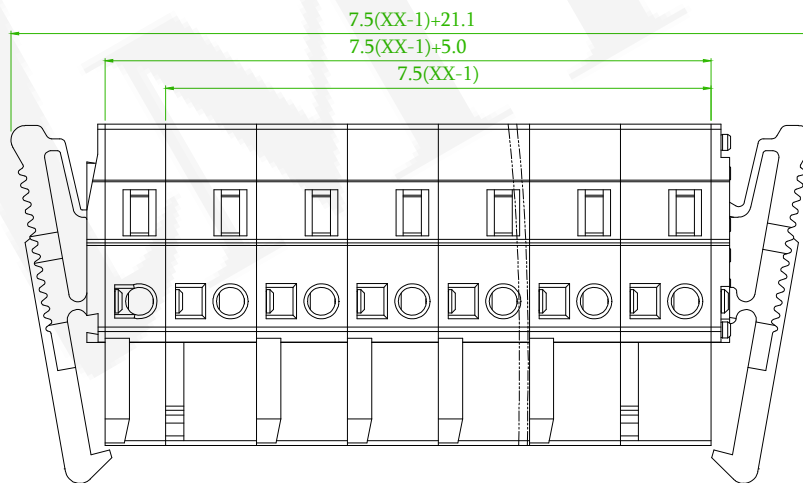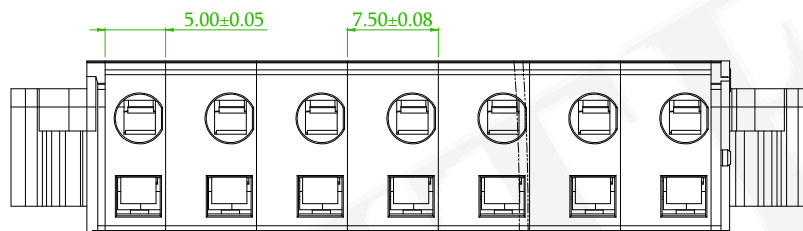

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

AMTEK
 糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	7.5mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM750N-W06FXXGLX-01				繪圖 DRAWN	Eric 2019/01/03
圖號 DRAWING NO.	GN011-EA436	版本 REV.	B	核對 CHECKED	承認 APPROVED	Jason 2019/01/03
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	承認 APPROVED	Jason 2019/01/03
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		

ECN NO:200718 Revise the Tolerance

Alice

2020/11/03

ECN NO. OR DESCRIPTION

REVISED

DATE



REV.