

ORDER INFORMATION

Electrical

Standard: IEC
Overvoltage category III III II
Pollution level 3 2 2
Rated Voltage: 300V 320V 630V
Rated Current: 12A 12A 12A
Wire range: 0.2-2.5mm²
withstanding voltage :1600V
Temperature: -40°C~+105°C

Material

Housing: PA66, UL94V-0
Contact: Copper Alloy
Plated: Tin Plated

5 T M 7 5 0 S - W 0 5 N X X G L X - 0 1

750:
Pitch 7.50mm

Series No.




No of Pins total
(02-24)

G:Gray

B:Bag
A:Tray



AMTEK 糧德
2019.09.25
Released DCC

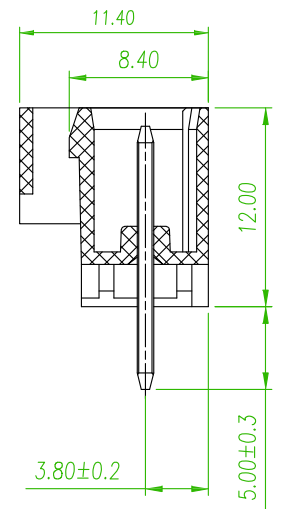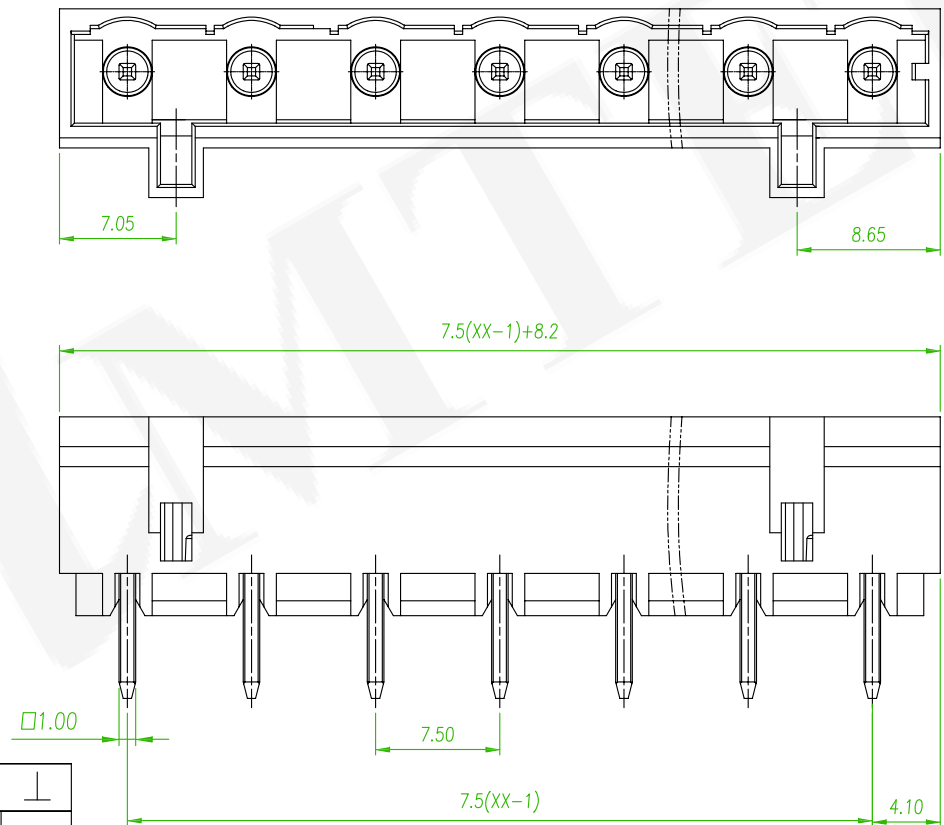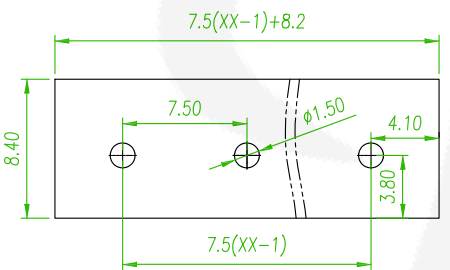

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM750S-W05NXXGLX-01				繪圖 DRAWN	Nick 2019/09/25
圖號 DRAWING NO.	GN011-EA463	版本 REV.	A	核對 CHECKED	Josh 2019/09/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/09/25	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		